



# **WELCOME**

P01	Company Profile
P02	Photo Gallery
P03	Photo Gallery
	CEMA B
P04	Troughing Idlers (Equal Length Rollers)
P05	Rubber Cushion Impact Troughing Idlers
P06	Return Idlers
P06	Flat Idlers
P06	Rubber Cushion Return Idlers
P07	Self-Aligning Troughing Idlers
P07	Self-Aligning Return Idlers
P08	Offset Center Roller Idlers
	CEMA C
P09	Troughing Idlers (Equal Length Rollers) - 4" Diameter
P10	Troughing Idlers (Equal Length Rollers) - 5" Diameter
P11	Troughing Idlers (Equal Length Rollers) - 6" Diameter
P12	
	Return Idlers
P12	Return Idlers Flat Idlers
P12 P13	
	Flat Idlers
P13	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter
P13 P14	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter
P13 P14 P15	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter Rubber Cushion Impact Troughing Idlers - 6" Diameter
P13 P14 P15 P16	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter Rubber Cushion Impact Troughing Idlers - 6" Diameter Rubber Cushion Return Idlers
P13 P14 P15 P16 P16	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter Rubber Cushion Impact Troughing Idlers - 6" Diameter Rubber Cushion Return Idlers Self-Aligning Return Idlers
P13 P14 P15 P16 P16 P17	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter Rubber Cushion Impact Troughing Idlers - 6" Diameter Rubber Cushion Return Idlers Self-Aligning Return Idlers Self-Aligning Troughing Idlers - 4" Diameter
P13 P14 P15 P16 P16 P17 P18	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter Rubber Cushion Impact Troughing Idlers - 6" Diameter Rubber Cushion Return Idlers Self-Aligning Return Idlers Self-Aligning Troughing Idlers - 4" Diameter Self-Aligning Troughing Idlers - 5" Diameter
P13 P14 P15 P16 P16 P17 P18 P19	Flat Idlers Rubber Cushion Impact Troughing Idlers - 4" Diameter Rubber Cushion Impact Troughing Idlers - 5" Diameter Rubber Cushion Impact Troughing Idlers - 6" Diameter Rubber Cushion Return Idlers Self-Aligning Return Idlers Self-Aligning Troughing Idlers - 4" Diameter Self-Aligning Troughing Idlers - 5" Diameter Self-Aligning Troughing Idlers - 6" Diameter


	CEMA D
P23	Troughing Idlers (Equal Length Rollers)
P24	Return Idlers
P24	Flat Idlers
P25	Rubber Cushion Impact Troughing Idlers
P26	Rubber Cushion Return Idlers
P26	Rubber Cushion Flat Idlers
P27	Self-Aligning Troughing Idlers
P28	Self-Aligning Return Idlers
P28	Feeder / Picking Troughing Idlers
P29	Troughing Idlers (Unequal Length Rollers)
	CEMA E
P30	Troughing Idlers (Equal Length Rollers)
P31	Rubber Cushion Impact Troughing Idlers
P31	Rubber Cushion Return Idlers
P32	Self-Aligning Troughing Idlers
P33	Return Idlers
P33	Rubber Cushion Flat Idlers
P33	Flat Idlers
P33	Return Aligning Idlers
P34	CEMA B & CEMA C Replacement Idler Rollers
P35	CEMA D & CEMA E Replacement Idler Rollers





#### MONSTER BELTING INDUSTRY CO., LTD

Office Address: No. 18, Powerlong Building, Qingdao, China; Tel: +86 532 55780186 Fax: +86 532 55780187, Phone: +86-18724717692 Email: sales@monsterbelting.com, www.monsterbelting.com

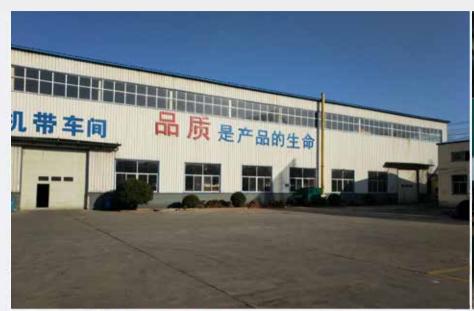



### **Company Overview**

Monster Belting Industry Co., Itd is a China-based professional manufacturer of belt conveyors and belt conveyor idlers. Established in 1998, our company was primarily engaged in manufacturing and marketing Carrier roller, Impact roller, Return roller, Rubber disc return roller, Spiral return roller, Pulley&Frame and so on. Qingdao Monster can supply customers with high quality rollers and the best after-sale service in order to establish the stable and long time business relation with every esteemed company.

Our products come in a wide variety of types and are widely used in electric power, metallurgy, mine, coal, cement, steel, chemical, port, hydroelectric power and grain industries. We have accumulated 22 years of experience in manufacturing conveyor idlers. So we know well how to produce and supply stable and reliableproducts to our customers. In order to improve the quality of conveyor idlers, we have established a strict quality control system. In addition, these operation staff members have rich technical trainings, and the quality management is strictly carried out in each step from product design and production to final inspection. We employ a team of technical personnel and have imported advanced production equipment and quality inspection equipment. In addition, we established a specialized CAD design center, a production and processing center and a product quality inspection center. As a result, our company received ISO9001: 2000 certification in 2006. Our idlers, pulleys, and other products have all received CE certification



#### **MONSTER BELTING INDUSTRY CO,. LTD**

Office Address: No. 18, Powerlong Building, Qingdao, China; Tel: +86 532 55780186 Fax: +86 532 55780187, Phone: +86-18724717692 Email: sales@monsterbelting.com, www.monsterbelting.com





#### MONSTER BELTING INDUSTRY CO., LTD

Office Address: No. 18, Powerlong Building, Qingdao, China; Tel: +86 532 55780186 Fax: +86 532 55780187, Phone: +86-18724717692 Email: sales@monsterbelting.com , www.monsterbelting.com



## Together, We Make It Better.




















### MONSTER BELTING INDUSTRY CO,. LTD

Office Address: No. 18, Powerlong Building, Qingdao, China;

Tel: +86 532 55780186 Fax: +86 532 55780187, Phone: +86-18724717692


Email: sales@monsterbelting.com , www.monsterbelting.com

### TROUGHING IDLERS (EQUAL LENGTH ROLLERS - 4" & 5" DIAMETER)

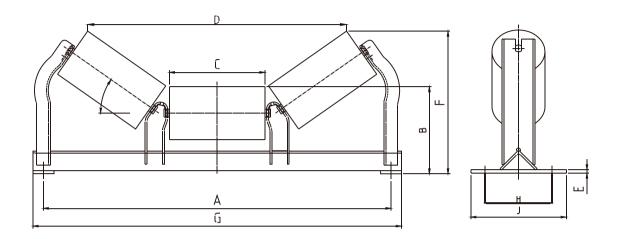

	PART NUMBER B			[	)		ı	=						WT				
	4"	5"	BW	Α	4"	5''	С	4"	5"	Е	4"	5"	G	Н	J	K	4"	5"
	B4-20E-14	B5-20E-14	14	23	7	7 1/2	6 1/16	17 11/16	17 1/4	3/16	9	9 3/8	25	6	8	1/2	24	28
	B4-20E-16	B5-20E-16	16	25	7	7 1/2	6 1/16	17 11/16	17 1/4	3/16	9	9 3/8	27	6	8	1/2	25	30
	B4-20E-18	B5-20E-18	18	27	7	7 1/2	7 1/16	21 11/16	20 3/4	3/16	9 3/8	9 1/2	29	6	8	1/2	26	32
	B4-20E-20	B5-20E-20	20	29	7	7 1/2	7 11/16	22 7/8	22 9/16	3/16	9 5/8	10 1/16	31	6	8	1/2	29	34
	B4-20E-24	B5-20E-24	24	33	7	7 1/2	9 1/16	27 3/8	27 1/16	3/16	10 1/16	10 5/8	35	6	8	1/2	31	39
	B4-20E-30	B5-20E-30	30	39	7	7 1/2	11 1/16	33 11/16	33 5/16	3/16	10 15/16	11 3/8	41	6	8	1/2	39	48
20°	B4-20E-36	B5-20E-36	36	45	7	7 1/2	13 1/16	39 3/4	39 7/16	3/16	11 5/8	12 1/8	47	6	8	1/2	45	55
	B4-20E-42	B5-20E-42	42	51	7 1/2	8	15 1/16	45 9/16	45 1/4	1/4	12 11/16	13 1/8	53	7 1/2	9 1/2	5/8	57	72
	B4-20E-48	B5-20E-48	48	57	7 1/2	8	17 1/16	51 11/16	51 5/16	1/4	13 3/8	13 7/8	59	7 1/2	9 1/2	5/8	64	80
	B4-35E-18	B5-35E-18	18	27	7	7 1/2	7 1/16	19 5/16	18 11/16	3/16	11	11 7/16	29	6	8	1/2	28	34
	B4-35E-20	B5-35E-20	20	29	7	7 1/2	7 11/16	20 15/16	20 3/8	3/16	11 3/8	11 13/16	31	6	8	1/2	30	37
	B4-35E-24	B5-35E-24	24	33	7	7 1/2	9 1/16	25 1/16	24 1/2	3/16	12 5/16	12 11/16	35	6	8	1/2	34	41
	B4-35E-30	B5-35E-30	30	39	7	7 1/2	11 1/16	30 13/16	30 1/4	3/16	13 9/16	14	41	6	8	1/2	42	51
٥٥٥		B5-35E-36	36	45	7	7 1/2	13 1/16	36 7/16	35 7/8	3/16	14 13/16	15 3/16	47	6	8	1/2	48	58
35°		B5-35E-42	42	51	7 1/2	8	15 1/16	41 11/16	41 1/4	1/4	16 3/8	16 13/16	53	7 1/2	9 1/2	5/8	61	73
	B4-35E-48	B5-35E-48	48	57	7 1/2	8	17 1/16	47 5/16	48 5/16	1/4	17 5/8	18	59	7 1/2	9 1/2	5/8	68	81
	B4-45E-18	B5-45E-18	18	27	7	7 1/2	7 1/16	18	17 5/16	3/16	12 1/16	12 7/16	29	6	8	1/2	30	35
	B4-45E-20	B5-45E-20	20	29	7	7 1/2	7 11/16	19 1/2	18 13/18	3/16	12 1/2	12 13/16	31	6	8	1/2	31	38
	B4-45E-24	B5-45E-24	24	33	7	7 1/2	9 1/16	23 5/16	22 9/16	3/16	13 9/16	13 15/16	35	6	8	1/2	35	44
	B4-45E-30	B5-45E-30	30	39	7	7 1/2	11 1/16	28 9/16	27 7/8	3/16	15 3/16	15 1/2	41	6	8	1/2	43	52
150		B5-45E-36	36	45	7	7 1/2	13 1/16	33 11/16	33	3/16	16 11/16	17	47	6	8	1/2	50	60
45°		B5-45E-42	42	51	7 1/2	8	15 1/16	38 1/2	37 13/16	1/4	18 9/16	18 7/8	53	7 1/2	9 1/2	5/8	62	75
	B4-45E-48	B5-45E-48	48	57	7 1/2	8	17 1/16	43 5/8	42 15/16	1/4	19 9/16	20 3/8	59	7 1/2	9 1/2	5/8	71	82

### RUBBER CUSHION IMPACT TROUGHING IDLERS-4" &5" DIAMETER

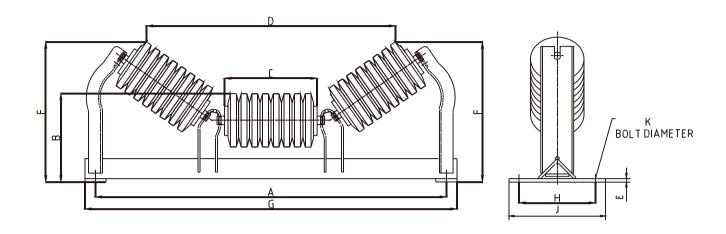


	PART	IUMBER	вw	Α	Е	3	С	I	)	Е	ı	F	G	н	J	K	W	/T
	4"	5"	DVV	A	4"	5"	C	4"	5"	_	4"	5"	٦		J	ĸ	4"	5"
	B4-20EI-18	B5-20E <b>I</b> -18	18	27	7	7 1/2	7 1/16	20 9/16	20 1/4	1/4	9 1/4	9 3/8	29	6	8	1/2	34	41
	B4-20EI-20	B5-20EI-20	20	29	7	7 1/2	7 11/16	22 3/8	22 1/16	1/4	9 1/2	9 15/16	31	6	8	1/2	35	42
	B4-20EI-24	B5-20EI-24	24	33	7	7 1/2	9 1/16	26 7/8	26 9/16	1/4	9 15/16	10 1/2	35	6	8	1/2	42	50
20°	B4-20EI-30	B5-20EI-30	30	39	7	7 1/2	11 1/16	33 3/16	32 13/16	1/4	10 13/16	11 1/4	41	6	8	1/2	53	61
	B4-20EI-36	B5-20EI-36	36	45	7	7 1/2	13 1/16	39 1/4	38 15/16	1/4	11 1/2	12	47	6	8	1/2	69	76
	B4-20EI-42	B5-20EI-42	42	51	7 1/2	8	15 1/16	45 1/16	44 3/4	5/16	12 9/16	13	53	7 1/2	9 1/2	5/8	88	97
	B4-20E <b>I</b> -48	B5-20E <b>I</b> -48	48	57	7 1/2	8	17 1/16	51 3/16	50 13/16	5/16	13 1/4	13 3/4	59	7 1/2	9 1/2	5/8	101	108
	B4-35EI-18	B5-35EI-18	18	27	7	7 1/2	7 1/16	18 15/16	18 5/16	1/4	10 7/8	11 5/16	29	6	8	1/2	36	43
	B4-35EI-20	B5-35EI-20	20	29	7	7 1/2	7 11/16	20 9/16	20	1/4	11 1/4	11 1/16	31	6	8	1/2	37	44
	B4-35EI-24	B5-35EI-24	24	33	7	7 1/2	9 1/16	24 11/16	24 1/8	1/4	12 3/16	12 9/16	35	6	8	1/2	44	52
35°	B4-35EI-30	B5-35EI-30	30	39	7	7 1/2	11 1/16	30 7/16	29 7/8	1/4	13 7/16	13 7/8	41	6	8	1/2	55	63
	B4-35EI-36	B5-35EI-36	36	45	7	7 1/2	13 1/16	36 1/16	35 1/2	1/4	14 11/16	15 1/16	47	6	8	1/2	71	78
	B4-35EI-42	B5-35EI-42	42	51	7 1/2	8	15 1/16	41 5/16	40 3/4	5/16	16 1/4	16 11/16	53	7 1/2	9 1/2	5/8	90	99
	B4-35E <b>I</b> -48	B5-35EI-48	48	57	7 1/2	8	17 1/16	46 15/16	46 3/8	5/16	17 1/2	17 7/8	59	7 1/2	9 1/2	5/8	103	110
	B4-45EI-18	B5-45E <b>I</b> -18	18	27	7	7 1/2	7 1/16	17 5/8	16 15/16	1/4	11 7/8	12 11/16	29	6	8	1/2	39	43
	B4-45EI-20	B5-45EI-20	20	29	7	7 1/2	7 11/16	19 1/8	18 7/16	1/4	12 1/3	12 5/8	31	6	8	1/2	38	45
	B4-45EI-24	B5-45EI-24	24	33	7	7 1/2	9 1/16	22 15/16	22 3/16	1/4	13 3/8	13 3/4	35	6	8	1/2	46	54
45°	B4-45EI-30	B5-45EI-30	30	39	7	7 1/2	11 1/16	27 15/16	27 1/2	1/4	15	15 5/16	41	6	8	1/2	57	65
	B4-45EI-36	B5-45EI-36	36	45	7	7 1/2	13 1/16	33 5/16	32 5/8	1/4	16 1/2	16 13/16	47	6	8	1/2	73	81
	B4-45EI-42	B5-45EI-42	42	51	7 1/2	8	15 1/16	38 1/8	37 7/16	5/16	18 3/8	18 11/16	53	7 1/2	9 1/2	5/8	92	101
	B4-45EI-48	B5-45E <b>I</b> -48	48	57	7 1/2	8	17 1/16	43 1/4	42 9/16	5/16	19 3/8	20 3/16	59	7 1/2	9 1/2	5/8	105	112




### RETURN IDLER - 4" &5" DIAMETER


PART I	NUMBER	BW	Α	В	С	W	<b>/</b> T
4"	5"	DVV				4"	5"
B4-RET-14	B5-RET-14	14	23	17 5/16	24 1/2	16	19
B4-RET-16	B5-RET-16	16	25	19 5/16	26 1/2	17	21
B4-RET-18	B5-RET-18	18	27	21 5/16	28 1/2	18	23
B4-RET-20	B5-RET-20	20	29	23 5/16	30 1/2	19	24
B4-RET-24	B5-RET-24	24	33	27 5/16	34 1/2	22	27
B4-RET-30	B5-RET-30	30	39	33 5/16	40 1/2	24	32
B4-RET-36	B5-RET-36	36	45	39 5/16	46 1/2	29	36
B4-RET-42	B5-RET-42	42	51	45 5/16	52 1/2	34	41
B4-RET-48	Г-48 B5-RET-48		57	51 5/16	58 1/2	36	11

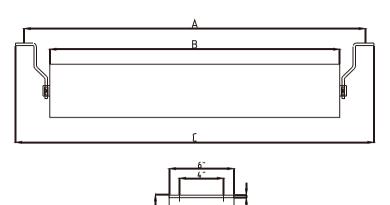

### FLAT IDLERS - 4" & 5" DIAMETER


PART I	NUMBER	BW	А	В	С	V	/T
4"	5"	DVV	^		C	4"	5"
B4-FLT-14	B5-FLT-14	14	23	17 5/16	24 15/16	16	19
B4-FLT-16	B5-FLT-16	16	25	19 5/16	26 15/16	17	21
B4-FLT-18	B5-FLT-18	18	27	21 5/16	28 15/16	18	23
B4-FLT-20	B5-FLT-20	20	29	23 5/16	30 15/16	19	24
B4-FLT-24	B5-FLT-24	24	33	27 5/16	34 15/16	21	28
B4-FLT-30	B5-FLT-30	30	39	33 5/16	40 15/16	25	32
B4-FLT-36	B5-FLT-36	36	45	39 5/16	46 15/16	28	37
B4-FLT-42	B5-FLT-42	42	51	45 5/16	52 15/16	31	41
B4-FLT-48	B5-FLT-48	48	57	51 5/16	58 15/16	34	46

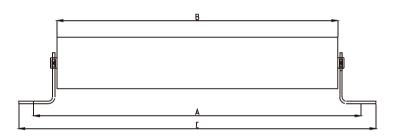





### RUBBER CUSHION RETURN IDLERS - 4" & 5" DIAMETER

PART N	NUMBER	DW				W	/T
4"	5"	BW	Α	В	С	4"	5"
B4-RETI-18	B5-RETI-18	18	27	21 7/16	28 7/16	21	26
B4-RETI-24	B5-RETI-24	24	33	27 7/16	34 7/16	24	30
B4-RETI-30	B5-RETI-30	30	39	33 7/16	40 7/16	27	35
B4-RETI-36	B5-RETI-36	36	45	39 7/16	46 7/16	33	39
B4-RETI-42	B5-RETI-42	42	51	45 7/16	52 7/16	35	42
B4-RETI-48	B5-RETI-48	48	57	51 7/16	58 7/16	37	48

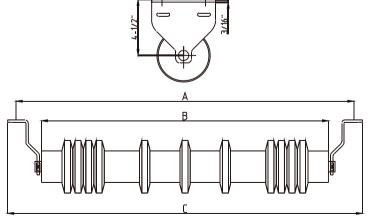


### SELF-ALIGNING TROUGHING IDLERS - 4" & 5" DIAMETER

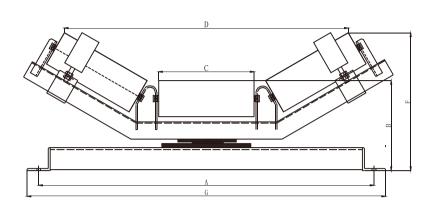




	PART N	UMBER	вw	۸	E	3	С		)	Е	F		G	Н	J	К	W	<i>/</i> Τ
	4"	5"	DVV	Α	4"	5''	C	4"	5"	_	4"	5"	G	"	,	^	4"	5"
	B4-20EA-18	B5-20EA-18	18	27	8 7/8	9 3/8	7 1/16	21 15/16	21 5/8	30 5/8	11 4/9	11 7/8	28 7/8	6	11 1/2	5/8	52	61
	B4-20EA-24	B5-20EA-24	24	33	8 7/8	9 3/8	9 1/16	27 11/16	27 3/8	36 3/8	12 1/8	12 4/7	34 7/8	6	11 1/2	5/8	70	76
20°		B5-20EA-30	30	39	8 15/16	9 7/16	11 1/16	33 7/16	33 1/8	42 3/16	12 7/8	13 1/3	40 7/8	6	11 1/2	5/8	92	95
20		B5-20EA-36	36	45	8 15/16	9 7/16	13 1/16	39 1/5	38 7/8	47 15/16	13 9/16	14	46 7/8	6	11 1/2	5/8	97	100
	B4-20EA-42	B5-20EA-42	42	51	9 5/16	9 13/16	15 1/16	44 15/16	44 5/8	53 15/16	14 5/8	15	52 7/8	6	11 1/2	5/8	118	127
	B4-20EA-48	B5-20EA-48	48	57	9 5/16	9 13/16	17 1/16	50 11/16	50 3/8	59 1/16	15 1/3	15 3/4	58 7/8	6	11 1/2	5/8	150	161
	B4-35EA-18	B5-35EA-18	18	27	8 7/8	9 3/8	7 1/16	19 5/16	18 11/16	32 13/16	13	13 1/2	28 7/8	6	11 1/2	5/8	53	62
	B4-35EA-24	B5-35EA-24	24	33	8 7/8	9 3/8	9 1/16	25 1/16	24 1/2	38 3/16	14 1/8	14 11/16	34 7/8	6	11 1/2	5/8	71	77
35°	B4-35EA-30	B5-35EA-30	30	39	8 15/16	9 7/16	11 1/16	30 13/16	30 1/4	44 3/16	15 5/16	15 7/8	40 7/8	6	11 1/2	5/8	94	97
35	B4-35EA-36	B5-35EA-36	36	45	8 15/16	9 7/16	13 1/16	36 7/16	35 7/8	48 15/16	16 7/16	17	46 7/8	6	11 1/2	5/8	99	102
	B4-35EA-42	B5-35EA-42	42	51	9 5/16	9 13/16	15 1/16	41 11/16	41 1/4	55	17 15/16	18 1/2	52 7/8	6	11 1/2	5/8	121	128
	B4-35EA-48	B5-35EA-48	48	57	9 5/16	9 13/16	17 1/16	47 5/16	56 5/16	60 5/8	19 1/8	19 2/3	58 7/8	6	11 1/2	5/8	153	162
	B4-45EA-18	B5-45EA-18	18	27	8 7/8	9 3/8	7 1/16	18	17 15/16	31 11/16	14 1/8	14 1/2	28 7/8	6	11 1/2	5/8	54	63
	B4-45EA-24	B5-45EA-24	24	33	8 7/8	9 3/8	9 1/16	23 5/16	22 9/16	36 13/16	15 9/16	15 15/16	34 7/8	6	11 1/2	5/8	72	78
45°	B4-45EA-30	B5-45EA-30	30	39	8 15/16	9 7/16	11 1/16	28 9/16	27 7/8	43 5/16	17	17 3/8	40 7/8	6	11 1/2	5/8	100	99
45	B4-45EA-36	B5-45EA-36	36	45	8 15/16	9 7/16	13 1/16	33 11/16	33	49 11/16	18 3/8	18 3/4	46 7/8	6	11 1/2	5/8	104	104
	B4-45EA-42	B5-45EA-42	42	51	9 5/16	9 13/16	15 1/16	38 1/2	37 13/16	54	20 3/16	20 9/16	52 7/8	6	11 1/2	5/8	124	129
	B4-45EA-48	B5-45EA-48	48	57	9 5/16	9 13/16	17 1/16	43 5/8	47 15/16	59 1/8	21 5/8	22	58 7/8	6	11 1/2	5/8	157	163

### SELF-ALIGNING RETURN IDLERS-4" & 5" DIAMETER

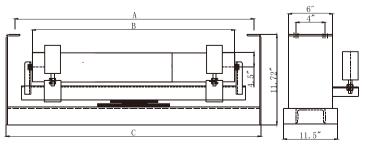


PART I	NUMBER	BW	Α	В	С	D	٧	٧T
4"	5"	DVV	^				4"	5''
B4-RETA-18	B5-RETA-18	18	27	21 5/16	29 3/4	23 5/8	77	82
B4-RETA-24	B5-RETA-24	24	33	27 5/16	35 3/4	29 5/8	86	93
B4-RETA-30	B5-RETA-30	30	39	33 5/16	41 3/4	35 5/8	100	110
B4-RETA-36	B5-RETA-36	36	45	39 5/16	47 3/4	41 5/8	110	114
B4-RETA-42	B5-RETA-42	42	51	45 5/16	53 3/4	47 5/8	137	145
B4-RETA-48	B5-RETA-48	48	57	51 5/16	59 3/4	53 5/8	144	152

### OFFSET CENTER ROLLER IDLERS - 4" & 5" DIAMETER

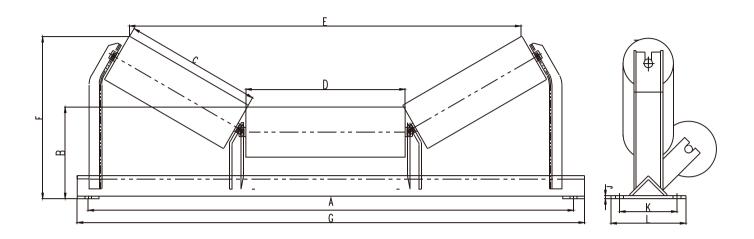


	PART N	NUMBER	BW	А	Е	3	С	D		E		F	G	н	J	K	L	W	<i>/</i> T
	4"	5"	DAA	^	4"	5"		В	4"	5"	4"	5''	G	п	J	K	-	4"	5"
	B4-2GO-18	B5-20GO-18	18	27	7	7 1/2	7 1/16	9 1/16	21 1/16	21 7/8	9 3/8	9 1/5	29	1/2	3/16	6	8	31	37
	B4-20GO-24	B5-20GO-24	24	33	7	7 1/2	9 1/16	11 1/16	27 1/2	27 1/16	10 1/16	10 5/8	35	1/2	3/16	6	8	36	43
20°	B4-20GO-30	B5-20GO-30	30	39	7	7 1/2	11 1/16	13 1/16	33 1/4	33 5/16	10 15/16	10 5/8	41	1/2	3/16	6	8	43	52
20	B4-20GO-36	B5-20GO-36	36	45	7	7 1/2	13 1/16	15 1/16	39	38 11/16	11 5/8	12 1/8	47	1/2	3/16	6	8	49	59
	B4-20GO-42	B5-20GO-42	42	51	7 1/2	8	15 1/16	17 1/16	44 3/4	44 7/16	12 11/16	13 1/8	53	5/8	3/16	6	8	63	74
	B4-20GO-48	B5-20GO-48	48	57	7 1/2	8	17 1/16	19 1/16	50 1/2	50 3/16	13 3/8	13 7/8	59	5/8	3/16	6	8	69	82
	B4-35GO-18	B5-35GO-18	18	27	7	7 1/2	7 1/16	9 1/16	19 1/2	19	11	11 7/16	29	1/2	3/16	6	8	31	38
	B4-35GO-24	B5-35GO-24	24	33	7	7 1/2	9 1/16	11 1/16	24 13/16	24 1/2	12 5/16	12 11/16	35	1/2	1/4	6	8	37	45
35°	B4-35GO-30	B5-35GO-30	30	39	7	7 1/2	11 1/16	13 1/16	30 1/16	29 1/2	13 9/16	14	41	1/2	1/4	6	8	45	54
33	B4-35GO-36	B5-35GO-36	36	45	7	7 1/2	13 1/16	15 1/16	35 5/16	34 13/16	14 13/16	15 3/16	47	1/2	1/4	6	8	51	61
	B4-35GO-42	B5-35GO-42	42	51	7 1/2	8	15 1/16	17 1/16	40 5/8	40 1/16	16 3/8	16 1/2	53	5/8	1/4	6	8	65	76
	B4-35GO-48	B5-35GO-48	48	57	7 1/2	8	17 1/16	19 1/16	45 7/8	45 3/8	17 1/3	17 2/3	59	5/8	1/4	6	8	71	84
	B4-45GO-18	B5-45GO-18	18	27	7	7 1/2	7 1/16	9 1/16	18	17 5/16	12 1/16	12 7/16	29	1/2	1/4	6	8	32	38
	B4-45GO-24	B5-45GO-24	24	33	7	7 1/2	9 1/16	11 1/16	22 15/16	22 1/4	13 9/16	13 15/16	35	1/2	1/4	6	8	38	45
45°	B4-45GO-30	B5-45GO-30	30	39	7	7 1/2	11 1/16	13 1/16	27 3/4	27 1/8	14 13/16	15 1/8	41	1/2	1/4	6	8	46	55
45	B4-45GO-36	B5-45GO-36	36	45	7	7 1/2	13 1/16	15 1/16	32 9/16	31 15/16	16 3/16	16 9/16	47	1/2	1/4	6	8	52	62
	B4-45GO-42	B5-45GO-42	42	51	7 1/2	8	15 1/16	17 1/16	37 1/5	36 3/4	18	18 5/16	53	5/8	1/4	6	8	66	78
	B4-45GO-48	B5-45GO-48	48	57	7 1/2	8	17 1/16	19 1/16	42 1/4	41 7/16	19 9/16	19 3/4	59	5/8	1/4	6	8	73	86

### TROUGHING IDLERS (EQUAL LENGTH ROLLERS) - 4" DIAMETER

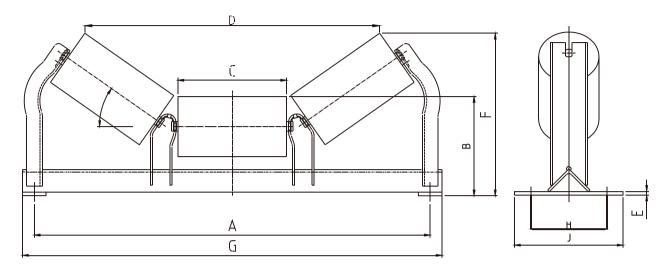


	PART NUMBER	BW	Α	В	С	D	E	F	G	Н	J	К	WT
	C4-20E-18	18	27	8	7 1/16	22 3/16	1/4	10 1/2	29	6	8	1/2	38
	C4-20E-24	24	33	8	9 1/16	27 15/16	5/16	11 3/16	35	6	9 1/2	5/8	40
	C4-20E-30	30	39	8	11 1/16	33 11/16	5/16	11 13/16	41	6	9 1/2	5/8	46
20°	C4-20E-36	36	45	8	13 1/16	39 7/16	5/16	12 5/8	47	6	9 1/2	5/8	53
20	C4-20E-42	42	51	8 1/2	15 1/16	45 3/16	5/16	13 13/16	53	7 1/2	9 1/2	5/8	69
	C4-20E-48	48	57	8 1/2	17 1/16	51	5/16	14 3/8	59	7 1/2	9 1/2	5/8	76
	C4-20E-54	54	63	8 1/2	19 1/16	56 3/4	3/8	15 1/8	65 1/2	9	11	5/8	87
	C4-20E-60	60	69	8 1/2	21 1/16	62 1/2	3/8	15 3/4	71 1/2	9	11	5/8	98
	C4-35E-18	18	27	8	7 1/16	20	1/4	12 1/4	29	6	8	1/2	35
	C4-35E-24	24	33	8	9 1/16	25 5/16	5/16	13 3/8	35	6	9 1/2	5/8	42
	C4-35E-30	30	39	8	11 1/16	30 9/16	5/16	14 9/16	41	6	9 1/2	5/8	50
35°	C4-35E-36	36	45	8	13 1/16	35 13/16	5/16	15 11/16	47	6	9 1/2	5/8	56
33	C4-35E-42	42	51	8 1/2	15 1/16	41 1/8	5/16	17 5/16	53	7 1/2	9 1/2	5/8	71
	C4-35E-48	48	57	8 1/2	17 1/16	46 3/8	5/16	18 7/16	59	7 1/2	9 1/2	5/8	78
	C4-35E-54	54	63	8 1/2	19 1/16	51 11/16	3/8	19 5/8	65 1/2	9	11	5/8	91
	C4-35E-60	60	69	8 1/2	21 1/16	56 15/16	3/8	20 3/4	71 1/2	9	11	5/8	101
	C4-45E-18	18	27	8	7 1/16	18 5/8	1/4	13 5/16	29	6	8	1/2	42
	C4-45E-24	24	33	8	9 1/16	22 3/16	5/16	14 11/16	35	6	9 1/2	5/8	44
	C4-45E-30	30	39	8	11 1/16	27 11/16	5/16	16 13/16	41	6	9 1/2	5/8	50
45°	C4-45E-36	36	45	8	13 1/16	31 7/8	5/16	18 3/16	47	6	9 1/2	5/8	57
45	C4-45E-42	42	51	8 1/2	15 1/16	36 2/3	5/16	20	53	7 1/2	9 1/2	5/8	76
	C4-45E-48	48	57	8 1/2	17 1/16	41 1/2	5/16	21 7/16	59	7 1/2	9 1/2	5/8	80
	C4-45E-54	54	63	8 1/2	19 1/16	46 1/2	3/8	23 1/4	65 1/2	9	11	5/8	92
	C4-45E-60	60	69	8 1/2	21 1/16	51 3/16	3/8	24 5/8	71 1/2	9	11	5/8	108

## TROUGHING IDLERS (EQUAL LENGTH ROLLERS) - 5" DIAMETER

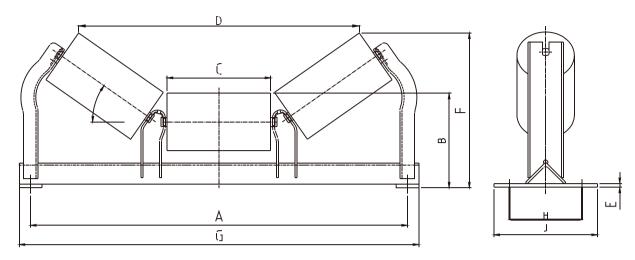


	PART NUMBER	BW	Α	В	С	D	Е	F	G	н	J	К	WT
	C5-20E-18	18	27	8 1/2	7 1/16	21 7/8	1/4	11	29	6	8	1/2	40
	C5-20E-24	24	33	8 1/2	9 1/16	27 5/8	5/16	11 11/16	35	6	9 1/2	5/8	45
	C5-20E-30	30	39	8 1/2	11 1/16	33 3/8	5/16	12 3/8	41	6	9 1/2	5/8	56
20°	C5-20E-36	36	45	8 1/2	13 1/16	39 1/8	5/16	13 1/16	47	6	9 1/2	5/8	64
20	C5-20E-42	42	51	9	15 1/16	44 7/8	5/16	14 3/16	53	7 1/2	9 1/2	5/8	79
	C5-20E-48	48	57	9	17 1/16	50 5/8	5/16	14 7/8	59	7 1/2	9 1/2	5/8	88
	C5-20E-54	54	63	9	19 1/16	56 7/16	3/8	15 3/4	65	9	11	5/8	100
	C5-20E-60	60	69	9	21 1/16	62 3/16	3/8	16 1/2	71 1/2	9	11	5/8	113
	C5-35E-18	18	27	8 1/2	7 1/16	19 7/16	1/4	12 3/8	29	6	8	1/2	41
	C5-35E-24	24	33	8 1/2	9 1/16	24 11/16	5/16	13 13/16	35	6	9 1/2	5/8	49
	C5-35E-30	30	39	8 1/2	11 1/16	30	5/16	14 13/16	41	6	9 1/2	5/8	59
35°	C5-35E-36	36	45	8 1/2	13 1/16	35 1/4	5/16	16 1/8	47	6	9 1/2	5/8	66
33	C5-35E-42	42	51	9	15 1/16	40 9/16	5/16	17 11/16	53	7 1/2	9 1/2	5/8	82
	C5-35E-48	48	57	9	17 1/16	45 13/16	5/16	18 7/8	59	7 1/2	9 1/2	5/8	91
	C5-35E-54	54	63	9	19 1/16	51 1/8	3/8	20	65 1/2	9	11	5/8	104
	C5-35E-60	60	69	9	21 1/16	56 3/8	3/8	21 1/5	71 1/2	9	11	5/8	116
	C5-45E-18	18	27	8 1/2	7 1/16	17 15/16	1/4	13 3/8	29	6	8	1/2	42
	C5-45E-24	24	33	8 1/2	9 1/16	22 3/4	5/16	15 1/16	35	6	9 1/2	5/8	51
	C5-45E-20	30	39	8 1/2	11 1/16	27 5/8	5/16	16 7/16	41	6	9 1/2	5/8	60
45°	C5-45E-36	36	45	8 1/2	13 1/16	32 7/16	5/16	17 13/16	47	6	9 1/2	5/8	67
40	C5-45E-42	42	51	9	15 1/16	37 1/4	5/16	19 5/8	53	7 1/2	9 1/2	5/8	86
	C5-45E-48	48	57	9	17 1/16	42 1/16	5/16	21 3/16	59	7 1/2	9 1/2	5/8	93
	C5-45E-54	54	63	9	19 1/16	46 15/16	3/8	22 7/8	65 1/2	9	11	5/8	107
	C5-45E-60	60	69	9	21 1/16	51 3/4	3/8	24 1/16	71 1/2	9	11	5/8	120

### TROUGHING IDLERS (EQUAL LENGTH ROLLERS) - 6" DIAMETER

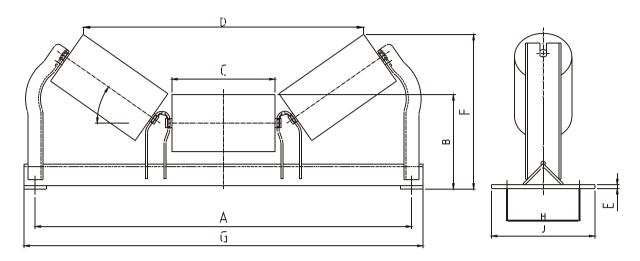


	PART NUMBER	BW	Α	В	С	D	E	F	G	Н	J	K	WT
	C6-20E-18	18	27	9	7 1/16	21 9/16	1/4	11 7/16	29	6	8	1/2	47
	C6-20E-24	24	33	9	9 1/16	27 5/16	5/16	12 1/8	35	6	9 1/2	5/8	57
	C6-20E-30	30	39	9	11 1/16	33 1/16	5/16	12 7/8	41	6	9 1/2	5/8	69
20°	C6-20E-36	36	45	9	13 1/16	38 13/16	5/16	13 9/16	47	6	9 1/2	5/8	78
20	C6-20E-42	42	51	9 1/2	15 1/16	44 9/16	5/16	14 11/16	53	7 1/2	9 1/2	5/8	86
	C6-20E-48	48	57	9 1/2	17 1/16	50 5/16	5/16	15 3/8	59	7 1/2	9 1/2	5/8	107
	C6-20E-54	54	63	9 1/2	19 1/16	56 1/16	3/8	16 1/8	65	9	11	5/8	121
	C6-20E-60	60	69	9 1/2	21 1/16	61 7/8	3/8	16 3/4	71 1/2	9	11	5/8	134
	C6-35E-18	18	27	9	7 1/16	18 7/8	1/4	13 1/16	29	6	8	1/2	49
	C6-35E-24	24	33	9	9 1/16	24 1/8	5/16	14 3/16	35	6	9 1/2	5/8	59
	C6-35E-30	30	39	9	11 1/16	29 7/16	5/16	15 3/8	41	6	9 1/2	5/8	71
35°	C6-35E-36	36	45	9	13 1/16	34 11/16	5/16	16 1/2	47	6	9 1/2	5/8	80
35	C6-35E-42	42	51	9 1/2	15 1/16	40	5/16	18 1/8	53	7 1/2	9 1/2	5/8	98
	C6-35E-48	48	57	9 1/2	17 1/16	45 1/4	5/16	19 1/4	59	7 1/2	9 1/2	5/8	109
	C6-35E-54	54	63	9 1/2	19 1/16	50 1/2	3/8	20 7/16	65	9	11	5/8	125
	C6-35E-60	60	69	9 1/2	21 1/16	55 13/16	3/8	21 9/16	71 1/2	9	11	5/8	138
	C6-45E-18	18	27	9	7 1/16	17 1/4	1/4	14	29	6	8	1/2	50
	C6-45E-24	24	33	9	9 1/16	22 1/16	5/16	15 7/16	35	6	9 1/2	5/8	61
	C6-45E-30	30	39	9	11 1/16	26 7/8	5/16	16 7/8	41	6	9 1/2	5/8	73
45°	C6-45E-36	36	45	9	13 1/16	31 3/4	5/16	18 1/4	47	6	9 1/2	5/8	82
45	C6-45E-42	42	51	9 1/2	15 1/16	36 9/16	5/16	20 1/8	53	7 1/2	9 1/2	5/8	103
	C6-45E-48	48	57	9 1/2	17 1/16	41 3/8	5/16	21 9/16	59	7 1/2	9 1/2	5/8	111
	C6-45E-54	54	63	9 1/2	19 1/16	46 3/16	3/8	23	65 1/2	9	11	5/8	129
	C6-45E-60	60	69	9 1/2	21 1/16	51	3/8	24 3/8	71 1/2	9	11	5/8	141

### RUBBER CUSHION IMPACT TROUGHING IDLERS - 4" DIAMETER

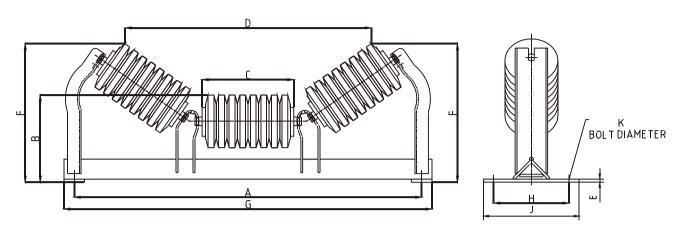


	PART NUMBER	BW	Α	В	С	D	Е	F	G	н	J	К	WT
	C4-20EI-18	18	27	8	7 1/16	21 3/16	1/4	10 3/8	29	6	8	1/2	36
	C4-20EI-24	24	33	8	9 1/16	26 15/16	5/16	11 1/16	35	6	9 1/2	5/8	44
	C4-20EI-30	30	39	8	11 1/16	32 5/8	5/16	11 11/16	41	6	9 1/2	5/8	54
20°	C4-20EI-36	36	45	8	13 1/16	38 7/16	5/16	12 1/2	47	6	9 1/2	5/8	68
20	C4-20EI-42	42	51	8 1/2	15 1/16	44 1/8	5/16	13 11/16	53	7 1/2	9 1/2	5/8	87
	C4-20EI-48	48	57	8 1/2	17 1/16	49 7/8	5/16	14 1/4	59	7 1/2	9 1/2	5/8	96
	C4-20EI-54	54	63	8 1/2	19 1/16	55 11/16	3/8	15	65 1/2	9	11	5/8	110
	C4-20EI-60	60	69	8 1/2	21 1/16	61 3/8	3/8	15 5/8	71 1/2	9	11	5/8	122
	C4-35EI-18	18	27	8	7 1/16	19 1/8	1/4	12 1/8	29	6	8	1/2	38
	C4-35EI-24	24	33	8	9 1/16	24 7/16	5/16	13 1/4	35	6	9 1/2	5/8	46
	C4-35EI-30	30	39	8	11 1/16	29 5/8	5/16	14 7/16	41	6	9 1/2	5/8	56
35°	C4-35EI-36	36	45	8	13 1/16	34 15/16	5/16	15 9/16	47	6	9 1/2	5/8	71
33	C4-35EI-42	42	51	8 1/2	15 1/16	40 3/16	5/16	17 3/16	53	7 1/2	9 1/2	5/8	90
	C4-35EI-48	48	57	8 1/2	17 1/16	45 7/16	5/16	18 5/16	59	7 1/2	9 1/2	5/8	99
	C4-35EI-54	54	63	8 1/2	19 1/16	50 3/4	3/8	19 1/2	65 1/2	9	11	5/8	113
	C4-35EI-60	60	69	8 1/2	21 1/16	56	3/8	20 5/8	71 1/2	9	11	5/8	126
	C4-45EI-18	18	27	8	7 1/16	18	1/4	13 1/8	29	6	8	1/2	39
	C4-45EI-24	24	33	8	9 1/16	22 13/16	5/16	14 1/2	35	6	9 1/2	5/8	47
	C4-45EI-30	30	39	8	11 1/16	27 9/16	5/16	15 15/16	41	6	9 1/2	5/8	58
45°	C4-45EI-36	36	45	8	13 1/16	32 7/16	5/16	17 3/8	47	6	9 1/2	5/8	73
40	C4-45EI-42	42	51	8 1/2	15 1/16	37 1/4	5/16	19 1/4	53	7 1/2	9 1/2	5/8	92
	C4-45EI-48	48	57	8 1/2	17 1/16	42 1/16	5/16	20 5/8	59	7 1/2	9 1/2	5/8	101
	C4-45EI-54	54	63	8 1/2	19 1/16	46 7/8	3/8	22 1/16	65 1/2	9	11	5/8	116
	C4-45EI-60	60	69	8 1/2	21 1/16	51 11/16	3/8	23 1/2	71 1/2	9	11	5/8	129

### RUBBER CUSHION IMPACT TROUGHING IDLERS - 5" DIAMETER

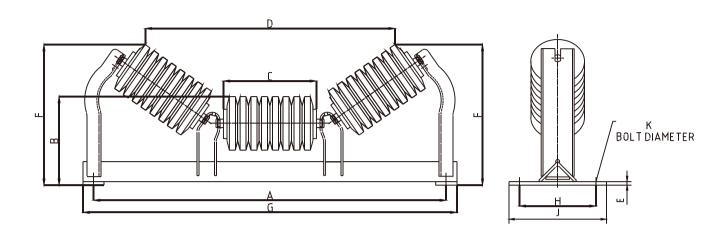

	PART NUMBER	BW	Α	В	С	D	E	F	G	Н	J	К	WT
	C5-20EI-18	18	27	8 1/2	7 1/16	20 7/8	1/4	10 7/8	29	6	8	1/2	41
	C5-20EI-24	24	33	8 1/2	9 1/16	26 5/8	5/16	11 9/16	35	6	9 1/2	5/8	50
	C5-20EI-30	30	39	8 1/2	11 1/16	32 5/16	5/16	12 1/4	41	6	9 1/2	5/8	61
20°	C5-20EI-36	36	45	8 1/2	13 1/16	38 1/16	5/16	12 15/16	47	6	9 1/2	5/8	76
20	C5-20EI-42	42	51	9	15 1/16	43 13/16	5/16	14 1/16	53	7 1/2	9 1/2	5/8	97
	C5-20EI-48	48	57	9	17 1/16	49 9/16	5/16	14 3/4	59	7 1/2	9 1/2	5/8	106
	C5-20EI-54	54	63	9	19 1/16	55 3/8	3/8	15 1/2	65 1/2	9	11	5/8	122
	C5-20EI-60	60	69	9	21 1/16	61 1/16	3/8	16 3/16	71 1/2	9	11	5/8	136
	C5-35EI-18	18	27	8 1/2	7 1/16	18 9/16	1/4	12 1/4	29	6	8	1/2	42
	C5-35EI-24	24	33	8 1/2	9 1/16	23 13/16	5/16	13 11/16	35	6	9 1/2	5/8	52
	C5-35EI-30	30	39	8 1/2	11 1/16	29 1/16	5/16	14 11/16	41	6	9 1/2	5/8	63
35°	C5-35EI-36	36	45	8 1/2	13 1/16	34 3/8	5/16	16	47	6	9 1/2	5/8	79
33	C5-35EI-42	42	51	9	15 1/16	39 5/8	5/16	17 9/16	53	7 1/2	9 1/2	5/8	100
	C5-35EI-48	48	57	9	17 1/16	44 7/8	5/16	18 3/4	59	7 1/2	9 1/2	5/8	110
	C5-35EI-54	54	63	9	19 1/16	50 3/16	3/8	19 7/8	65 1/2	9	11	5/8	125
	C5-35EI-60	60	69	9	21 1/16	55 7/16	3/8	21 1/16	71 1/2	9	11	5/8	140
	C5-45EI-18	18	27	8 1/2	7 1/16	17 1/4	1/4	13 7/16	29	6	8	1/2	44
	C5-45EI-24	24	33	8 1/2	9 1/16	22 1/16	5/16	14 7/8	35	6	9 1/2	5/8	53
	C5-45EI-30	30	39	8 1/2	11 1/16	26 7/8	5/16	16 5/16	41	6	9 1/2	5/8	65
45°	C5-45EI-36	36	45	8 1/2	13 1/16	31 11/16	5/16	17 3/4	47	6	9 1/2	5/8	81
43	C5-45EI-42	42	51	9	15 1/16	36 1/2	5/16	19 9/16	53	7 1/2	9 1/2	5/8	102
	C5-45EI-48	48	57	9	17 1/16	41 1/3	5/16	21	59	7 1/2	9 1/2	5/8	112
	C5-45EI-54	54	63	9	19 1/16	46 1/5	3/8	22 7/16	65 1/2	9	11	5/8	128
	C5-45EI-60	60	69	9	21 1/16	51	3/8	23 7/8	71 1/2	9	11	5/8	143


### RUBBER CUSHION IMPACT TROUGHING IDLERS - 6" DIAMETER

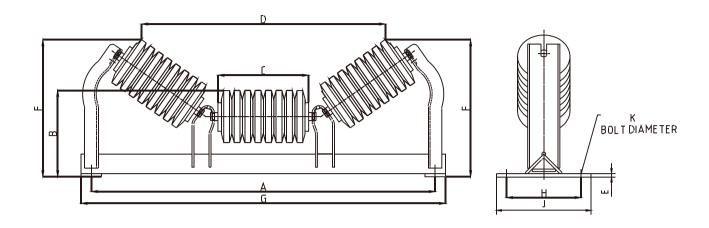


	PART NUMBER	BW	Α	В	С	D	Е	F	G	н	J	К	WT
	C6-20EI-18	18	27	9	7 1/16	20 1/2	1/4	11 5/16	29	6	8	1/2	49
	C6-20EI-24	24	33	9	9 1/16	26 1/4	5/16	12	35	6	9 1/2	5/8	62
	C6-20EI-30	30	39	9	11 1/16	31 15/16	5/16	12 3/4	41	6	9 1/2	5/8	74
20°	C6-20EI-36	36	45	9	13 1/16	37 3/4	5/16	13 7/16	47	6	9 1/2	5/8	90
20	C6-20EI-42	42	51	9 1/2	15 1/16	43 7/16	5/16	14 9/16	53	7 1/2	9 1/2	5/8	111
	C6-20EI-48	48	57	9 1/2	17 1/16	49 3/16	5/16	15 1/4	59	7 1/2	9 1/2	5/8	126
	C6-20EI-54	54	63	9 1/2	19 1/16	55	3/8	15 15/16	65	9	11	5/8	136
	C6-20EI-60	60	69	9 1/2	21 1/16	60 11/16	3/8	16 5/8	71 1/2	9	11	5/8	146
	C6-35EI-18	18	27	9	7 1/16	18	1/4	12 15/16	29	6	8	1/2	48
	C6-35EI-24	24	33	9	9 1/16	23 1/4	5/16	14 1/16	35	6	9 1/2	5/8	59
	C6-35EI-30	30	39	9	11 1/16	28 1/2	5/16	15 1/4	41	6	9 1/2	5/8	73
35°	C6-35EI-36	36	45	9	13 1/16	33 11/16	5/16	16 3/8	47	6	9 1/2	5/8	90
33	C6-35EI-42	42	51	9 1/2	15 1/16	39	5/16	18	53	7 1/2	9 1/2	5/8	112
	C6-35EI-48	48	57	9 1/2	17 1/16	44 5/16	5/16	19 1/8	59	7 1/2	9 1/2	5/8	124
	C6-35EI-54	54	63	9 1/2	19 1/16	49 5/8	3/8	20 5/16	65	9	11	5/8	142
	C6-35EI-60	60	69	9 1/2	21 1/16	54 13/16	3/8	21 7/16	71 1/2	9	11	5/8	159
	C6-45EI-18	18	27	9	7 1/16	16 4/7	1/4	13 13/16	29	6	8	1/2	50
	C6-45EI-24	24	33	9	9 1/16	21 3/8	5/16	15 1/4	35	6	9 1/2	5/8	61
	C6-45EI-30	30	39	9	11 1/16	26 3/16	5/16	16 11/16	41	6	9 1/2	5/8	74
45°	C6-45EI-36	36	45	9	13 1/16	31	5/16	18 1/16	47	6	9 1/2	5/8	92
45	C6-45EI-42	42	51	9 1/2	15 1/16	35 13/16	5/16	19 15/16	53	7 1/2	9 1/2	5/8	114
	C6-45EI-48	48	57	9 1/2	17 1/16	40 5/8	5/16	21 3/8	59	7 1/2	9 1/2	5/8	127
	C6-45EI-54	54	63	9 1/2	19 1/16	45 1/2	3/8	22 13/16	65 1/2	9	11	5/8	144
	C6-45EI-60	60	69	9 1/2	21 1/16	50 1/4	3/8	24 3/16	71 1/2	9	11	5/8	162




### RUBBER CUSHION RETURN IDLER - 4" & 5" & 6" DIAMETER

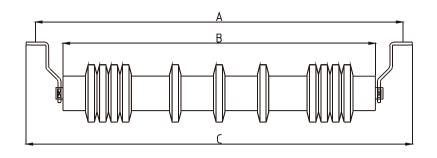




PART	PART	PART	BW			В	С		WT	
NUMBER 4"	NUMBER 5"	NUMBER 6"	DVV	A		Ь	C	4"	5''	6"
C4-RETI-18	C5-RETI-18	C6-RETI-18	18	27	21	7/16	28 1/2	16	21	23
C4-RETI-24	C5-RETI-24	C6-RETI-24	24	33	27	7/16	34 1/2	19	25	30
C4-RETI-30	C5-RETI-30	C6-RETI-30	30	39	33	7/16	40 1/2	22	30	34
C4-RETI-36	C5-RETI-36	C6-RETI-36	36	45	39	7/16	46 1/2	28	34	40
C4-RETI-42	C5-RETI-42	C6-RETI-42	42	51	45	7/16	52 1/2	30	37	43
C4-RETI-48	C5-RETI-48	C6-RETI-48	48	57	51	7/16	58 1/2	32	43	49
C4-RETI-54	C5-RETI-54	C6-RETI-54	54	63	57	7/16	64 1/2	37	48	53
C4-RETI-60	C5-RETI-60	C6-RETI-60	60	69	63	7/16	70 1/2	39	52	57


### SELF-ALIGNING RETURN IDLERS - 4" 5" 6" DIAMETER

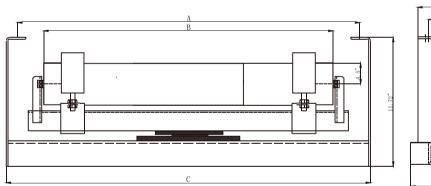




PART	PART	PART	BW	A		В	С	D		WT	
NUMBER 4"	NUMBER 5"	NUMBER 6"	D BW	^		Ь	`		4"	5''	6''
C4-RETA-18	C5-RETA-18	C6-RETA-18	18	27	21	5/16	29 3/4	23 5/8	72	73	76
C4-RETA-24	C5-RETA-24	C6-RETA-24	24	33	27	5/16	35 3/4	29 5/8	81	83	87
C4-RETA-30	C5-RETA-30	C6-RETA-30	30	39	33	5/16	41 3/4	35 5/8	87	96	99
C4-RETA-36	C5-RETA-36	C6-RETA-36	36	45	39	5/16	47 3/4	41 5/8	102	107	125
C4-RETA-42	C5-RETA-42	C6-RETA-42	42	51	45	5/16	53 3/4	47 5/8	129	133	135
C4-RETA-48	C5-RETA-48	C6-RETA-48	48	57	51	5/16	59 3/4	53 5/8	141	146	148
C4-RETA-54	C5-RETA-54	C6-RETA-54	54	63	57	5/16	65 3/4	59 5/8	164	167	170
C4-RETA-60	C5-RETA-60	C6-RETA-60	60	69	63	5/16	71 3/4	65 5/8	178	181	188


### SELF-ALIGNING TROUGHING IDLERS - 4" DIAMETER

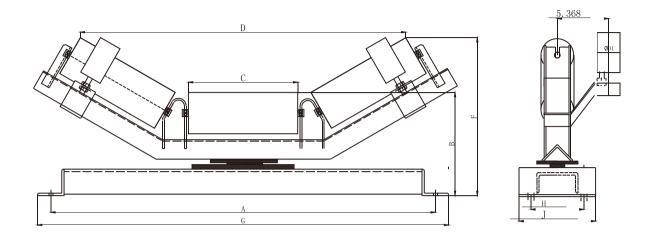

	PART NUMBER	BW	Α	В	С	D	E	F	G	Н	J	K	WT
	C4-20EA-18	18	27	8 7/8	7 1/16	21 15/16	30 5/8	11 7/16	28 7/8	6	11 1/2	5/8	72
	C4-20EA-24	24	33	8 7/8	9 1/16	27 11/16	36 3/8	12 1/8	34 7/8	6	11 1/2	5/8	84
	C4-20EA-30	30	39	8 15/16	11 1/16	33 7/16	42 3/16	12 7/8	40 7/8	6	11 1/2	5/8	102
20°	C4-20EA-36	36	45	8 15/16	13 1/16	39 3/16	47 15/16	13 9/16	46 7/8	6	11 1/2	5/8	111
20	C4-20EA-42	42	51	9 5/16	15 1/16	44 15/16	53 15/16	14 5/8	52 7/8	6	11 1/2	5/8	132
	C4-20EA-48	48	57	9 5/16	17 1/16	50 11/16	59 1/16	15 5/16	58 7/8	6	11 1/2	5/8	157
	C4-20EA-54	54	63	9 7/16	19 1/16	56 7/16	67 7/16	16 1/8	64 7/8	6	11 1/2	5/8	167
	C4-20EA-60	60	69	9 7/16	21 1/16	62 3/16	71 3/16	16 13/16	70 7/8	6	11 1/2	5/8	181
	C4-35EA-18	18	27	8 7/8	7 1/16	20	32 13/16	12 15/16	28 7/8	6	11 1/2	5/8	75
	C4-35EA-24	24	33	8 7/8	9 1/16	25 5/16	38 3/16	14 1/8	34 7/8	6	11 1/2	5/8	85
	C4-35EA-30	30	39	8 15/16	11 1/16	30 9/16	44 3/16	15 5/16	40 7/8	6	11 1/2	5/8	103
35°	C4-35EA-36	36	45	8 15/16	13 1/16	35 13/16	48 15/16	16 7/16	46 7/8	6	11 1/2	5/8	113
35	C4-35EA-42	42	51	9 5/16	15 1/16	41 1/8	55	17 15/16	52 7/8	6	11 1/2	5/8	134
	C4-35EA-48	48	57	9 5/16	17 1/16	46 3/8	60 5/8	19 1/8	58 7/8	6	11 1/2	5/8	159
	C4-35EA-54	54	63	9 7/16	19 1/16	51 11/16	65 1/4	20 3/8	64 7/8	6	11 1/2	5/8	171
	C4-35EA-60	60	69	9 7/16	21 1/16	56 15/16	70 9/16	21 9/16	70 7/8	6	11 1/2	5/8	185
	C4-45EA-18	18	27	8 7/8	7 1/16	18 5/8	31 11/16	14 1/8	28 7/8	6	11 1/2	5/8	78
	C4-45EA-24	24	33	8 7/8	9 1/16	23 1/2	36 13/16	15 9/16	34 7/8	6	11 1/2	5/8	86
	C4-45EA-30	30	39	8 15/16	11 1/16	28 5/16	45 5/16	17	40 7/8	6	11 1/2	5/8	104
45°	C4-45EA-36	36	45	8 15/16	13 1/16	33 1/8	49 11/16	18 3/8	46 7/8	6	11 1/2	5/8	115
45	C4-45EA-42	42	51	9 5/16	15 1/16	37 15/16	54	20 3/16	52 7/8	6	11 1/2	5/8	136
	C4-45EA-48	48	57	9 5/16	17 1/16	42 13/16	59 1/8	21 5/8	58 7/8	6	11 1/2	5/8	160
	C4-45EA-54	54	63	9 7/16	19 1/16	47 5/8	63 3/4	23 1/8	64 7/8	6	11 1/2	5/8	175
	C4-45EA-60	60	69	9 7/16	21 1/16	52 7/16	68 5/16	24 9/16	70 7/8	6	11 1/2	5/8	189


### SELF-ALIGNING TROUGHING IDLERS - 5" DIAMETER

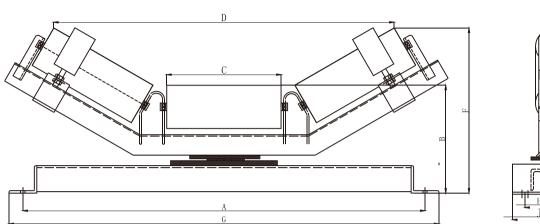




	PART NUMBER	BW	Α	В	С	D	Е	F	G	Н	٦	K	WT
	C5-20EA-18	18	27	9 3/8	7 1/16	21 5/8	30 5/8	11 7/8	28 7/8	6	11 1/2	5/8	74
	C5-20EA-24	24	33	9 3/8	9 1/16	27 3/8	36 3/8	12 9/16	34 7/8	6	11 1/2	5/8	86
	C5-20EA-30	30	39	9 7/16	11 1/16	33 1/8	42 3/16	13 15/16	40 7/8	6	11 1/2	5/8	104
	C5-20EA-36	36	45	9 7/16	13 1/16	38 7/8	47 15/16	14	46 7/8	6	11 1/2	5/8	114
20°	C5-20EA-42	42	51	9 13/16	15 1/16	44 5/8	53 15/16	15 1/16	52 7/8	7 1/2	11 1/2	5/8	134
	C5-20EA-48	48	57	9 13/16	17 1/16	50 3/5	59 1/16	15 3/4	58 7/8	7 1/2	11 1/2	5/8	160
	C5-20EA-54	54	63	9 15/16	19 1/16	56 1/8	67 7/16	16 9/16	64 7/8	9	11 1/2	5/8	170
	C5-20EA-60	60	69	9 15/16	21 1/16	61 15/16	71 3/16	17 1/4	70 7/8	9	11 1/2	5/8	185
	C5-35EA-18	18	27	9 3/8	7 1/16	19 7/16	32 13/16	13 1/2	28 7/8	6	11 1/2	5/8	77
	C5-35EA-24	24	33	9 3/8	9 1/16	24 11/16	38 3/16	14 11/16	34 7/8	6	11 1/2	5/8	87
	C5-35EA-30	30	39	9 7/16	11 1/16	30	44 3/16	15 7/8	40 7/8	6	11 1/2	5/8	105
35°	C5-35EA-36	36	45	9 7/16	13 1/16	35 1/4	48 15/16	17	46 7/8	6	11 1/2	5/8	115
33	C5-35EA-42	42	51	9 13/16	15 1/16	40 9/16	55	18 1/2	52 7/8	7 1/2	11 1/2	5/8	136
	C5-35EA-48	48	57	9 13/16	17 1/16	45 13/16	60 5/8	19 11/16	58 7/8	7 1/2	11 1/2	5/8	161
	C5-35EA-54	54	63	9 15/16	19 1/16	51 1/8	65 1/4	20 15/16	64 7/8	9	11 1/2	5/8	173
	C5-35EA-60	60	69	9 15/16	21 1/16	56 3/8	70 9/16	22 1/8	70 7/8	9	11 1/2	5/8	188
	C5-45EA-18	18	27	9 3/8	7 1/16	17 /15/16	31 11/16	14 1/2	28 7/8	6	11 1/2	5/8	80
	C5-45EA-24	24	33	9 3/8	9 1/16	22 3/4	36 13/16	15 15/16	34 7/8	6	11 1/2	5/8	88
	C5-45EA-30	30	39	9 7/16	11 1/16	27 5/8	45 5/16	17 3/8	40 7/8	6	11 1/2	5/8	106
45°	C5-45EA-36	36	45	9 7/16	13 1/16	32 7/16	49 11/16	18 3/4	46 7/8	6	11 1/2	5/8	116
13	C5-45EA-42	42	51	9 13/16	15 1/16	37 1/4	54	20 9/16	52 7/8	7 1/2	11 1/2	5/8	137
	C5-45EA-48	48	57	9 13/16	17 1/16	42 1/16	59 1/8	22	58 7/8	7 1/2	11 1/2	5/8	163
	C5-45EA-54	54	63	9 15/16	19 1/16	46 15/16	63 3/4	23 1/2	64 7/8	9	11 1/2	5/8	176
	C5-45EA-60	60	69	9 15/16	21 1/16	51 3/4	68 5/16	24 15/16	70 7/8	9	11 1/2	5/8	189


### SELF-ALIGNING TROUGHING IDLERS - 6"DIAMETER

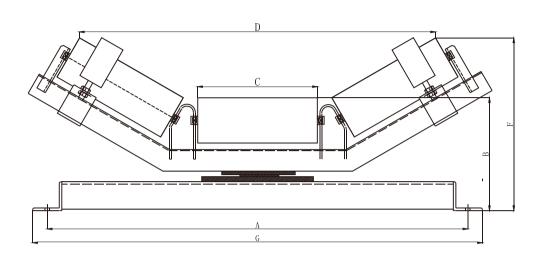




	PART NUMBER	BW	Α	В	С	D	Е	F	G	Н	J	K	WT
	C6-20EA-18	18	27	9 7/8	7 1/16	21 5/16	30 5/8	12 1/2	28 7/8	6	11 1/2	5/8	77
•	C6-20EA-24	24	33	9 7/8	9 1/16	27 1/16	36 3/8	13 3/16	34 7/8	6	11 1/2	5/8	89
•	C6-20EA-30	30	39	9 15/16	11 1/16	32 13/16	42 3/16	14	40 7/8	6	11 1/2	5/8	101
20°	C6-20EA-36	36	45	9 15/16	13 1/16	38 9/16	47 15/16	14 5/8	46 7/8	6	11 1/2	5/8	118
20	C6-20EA-42	42	51	10 5/16	15 1/16	44 5/16	53 15/16	15 3/4	52 7/8	6	11 1/2	5/8	140
	C6-20EA-48	48	57	10 5/16	17 1/16	50 1/16	59 1/16	16 7/16	58 7/8	6	11 1/2	5/8	166
	C6-20EA-54	54	63	10 7/16	19 1/16	55 13/16	67 7/16	17 3/16	64 7/8	6	11 1/2	5/8	176
	C6-20EA-60	60	69	10 7/16	21 1/16	61 9/16	71 3/16	17 13/16	70 7/8	6	11 1/2	5/8	192
	C6-35EA-18	18	27	9 7/8	7 1/16	18 7/8	32 13/16	14	28 7/8	6	11 1/2	5/8	79
	C6-35EA-24	24	33	9 7/8	9 1/16	24 1/8	38 3/16	15 1/4	34 7/8	6	11 1/2	5/8	89
	C6-35EA-30	30	39	9 15/16	11 1/16	29 7/16	44 3/16	16 7/16	40 7/8	6	11 1/2	5/8	105
35°	C6-35EA-36	36	45	9 15/16	13 1/16	34 11/16	48 15/16	17 9/16	46 7/8	6	11 1/2	5/8	119
33	C6-35EA-42	42	51	10 5/16	15 1/16	40	55	19 1/16	52 7/8	6	11 1/2	5/8	140
	C6-35EA-48	48	57	10 5/16	17 1/16	45 1/4	60 5/8	20 1/4	58 7/8	6	11 1/2	5/8	167
	C6-35EA-54	54	63	10 7/16	19 1/16	50 1/2	65 1/4	21 1/2	64 7/8	6	11 1/2	5/8	179
	C6-35EA-60	60	69	10 7/16	21 1/16	55 13/16	70 9/16	22 11/16	70 7/8	6	11 1/2	5/8	193
	C6-45EA-18	18	27	9 7/8	7 1/16	17 1/4	31 11/16	14 7/8	28 7/8	6	11 1/2	5/8	80
	C6-45EA-24	24	33	9 7/8	9 1/16	22 1/16	36 13/16	16 5/16	34 7/8	6	11 1/2	5/8	90
	C6-45EA-30	30	39	9 15/16	11 1/16	26 7/8	45 5/16	17 3/4	40 7/8	6	11 1/2	5/8	109
45°	C6-45EA-36	36	45	9 15/16	13 1/16	31 3/4	49 11/16	19 1/8	46 7/8	6	11 1/2	5/8	120
45	C6-45EA-42	42	51	10 5/16	15 1/16	36 9/16	54	20 15/16	52 7/8	6	11 1/2	5/8	142
	C6-45EA-48	48	57	10 5/16	17 1/16	41 3/8	59 1/8	22 3/8	58 7/8	6	11 1/2	5/8	169
	C6-45EA-54	54	63	10 7/16	19 1/16	46 3/16	63 3/4	23 7/8	64 7/8	6	11 1/2	5/8	180
	C6-45EA-60	60	69	10 7/16	21 1/16	51	68 5/16	25 5/16	70 7/8	6	11 1/2	5/8	194


### TROUGHING IDLERS (UNEQUAL LENGTH ROLLERS) - 4" 5" 6" DIAMETER

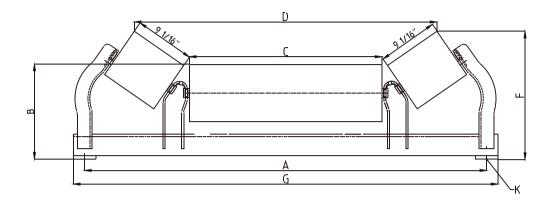




	PARTN	IUMBER	D)4/		_		С	[	)		ı	-				14	W	/T
	35°	45°	BW	Α	В	35°	45°	35°	45°	E	35°	45°	G	Н	J	K	35°	45°
	C4-35U-30	C4-45U-30	30	39	8	15 1/8	15 1/8	31 5/16	29 1/2	5/16	13 5/16	14 11/16	41	6	9 1/2	5/8	49	51
	C4-35U-36	C4-45U-36	36	45	8	21 1/8	21 1/8	37 5/8	35 13/16	5/16	13 5/16	14 11/16	47	6	9 1/2	5/8	55	56
4"	C4-35U-42	C4-45U-42	42	27	8 1/2	26 5/8	26 3/8	43 5/8	41 13/16	5/16	13 3/8	14 3/4	53	7 1/2	9 1/2	5/8	68	69
4	C4-35U-48	C4-45U-48	48	29	8 1/2	32 5/8	32 3/8	49 5/8	47 13/16	5/16	13 3/8	14 3/4	59	7 1/2	9 1/2	5/8	74	76
	C4-35U-54	C4-45U-54	54	33	8 1/2	38 5/8	37 11/16	55 5/8	53 13/16	5/16	13 3/8	14 7/8	65 1/2	9	11	5/8	86	90
	C4-35U-60	C4-45U-60	60	39	8 1/2	44 1/8	43 11/16	61 5/8	59 13/16	3/8	13 7/16	14 7/8	71 1/2	9	11	5/8	95	97
	C5-35U-30	C5-45U-30	30	27	8 1/2	15 1/8	15 1/8	30 7/8	29 1/16	5/16	13 11/16	15	41	6	9 1/2	5/8	58	60
	C5-35U-36	C5-45U-36	36	29	8 1/2	21 1/8	21 1/8	36 7/8	35 1/16	5/16	13 11/16	15	47	6	9 1/2	5/8	65	66
5"	C5-35U-42	C5-45U-42	42	33	9	26 5/8	26 3/8	43	41 3/16	5/16	13 3/4	15 1/16	53	7 1/2	9 1/2	5/8	79	81
5	C5-35U-48	C5-45U-48	48	39	9	32 5/8	32 3/8	49	47 3/16	5/16	13 3/4	15 1/16	59	7 1/2	9 1/2	5/8	87	88
	C5-35U-54	C5-45U-54	54	45	9	38 1/8	37 11/16	55 1/8	53 1/4	5/16	13 13/16	15 3/16	65 1/2	9	11	5/8	100	104
	C5-35U-60	C5-45U-60	60	51	9	44 1/8	43 11/16	61 1/8	59 1/4	5/16	13 7/8	15 13/16	71 1/2	9	11	5/8	111	112
	C6-35U-30	C6-45U-30	30	57	9	15 1/8	15 1/8	30 3/8	28 3/8	5/16	14 1/8	15 5/16	41	6	9 1/2	5/8	70	72
	C6-35U-36	C6-45U-36	36	27	9	21 1/8	21 1/8	36 3/8	34 3/8	5/16	14 1/8	15 5/16	47	6	9 1/2	5/8	79	80
C.I.	C6-35U-42	C6-45U-42	42	29	9 1/2	26 5/8	26 3/8	42 1/2	40 1/2	5/16	14 3/16	15 7/16	53	7 1/2	9 1/2	5/8	94	95
6"	C6-35U-48	C6-45U-48	48	33	9 1/2	32 5/8	32 3/8	48 1/2	46 1/2	5/16	14 3/16	15 7/16	59	7 1/2	9 1/2	5/8	104	105
	C6-35U-54	C6-45U-54	54	39	9 1/2	38 1/8	37 11/16	54 5/8	52 5/8	3/8	14 1/4	15 7/8	65	9	11	5/8	118	121
	C6-35U-60	C6-45U-60	60	45	9 1/2	44 1/8	43 11/16	60 5/8	58 5/8	3/8	14 5/16	15 7/8	71 1/2	9	11	5/8	130	131


### OFFSET CENTER ROLLER IDLER - 5" & 6" DIAMETER

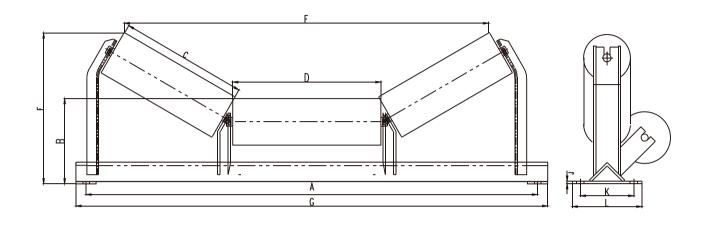

	PART N	JMBER	вw		Е	3	С	D	E			F	G					W	/Т
	5"	6"	DVV	Α	5"	6"		D	5"	6"	5"	6"	G	Н	J	K	L	5"	6"
	C5-20GO-18	C6-20GO-18	18	27	8 1/2	9	7 1/16	9 1/6	21 7/8	21 1/2	11	11 7/16	29	1/2	1/4	6	8	44	52
	C5-20GO-24	C6-20GO-24	24	33	8 1/2	9	9 1/16	11 1/16	27 5/8	27 5/16	11 11/16	12 1/8	35	5/8	5/16	6	9 1/2	51	62
	C5-20GO-30	C6-20GO-30	30	39	8 1/2	9	11 1/16	13 1/6	33 3/8	33 1/16	12 3/8	12 7/8	41	5/8	5/16	6	9 1/2	61	74
20°	C5-20GO-36	C6-20GO-36	36	45	8 1/2	9	13 1/16	15 1/6	39 1/8	38 13/16	13 1/16	13 9/16	47	5/8	5/16	6	9 1/2	68	83
20	C5-20GO-42	C6-20GO-42	42	51	9	9 1/2	15 1/16	17 1/16	44 7/8	44 9/16	14 3/16	14 11/16	53	5/8	5/16	7 1/2	9 1/2	84	100
	C5-20GO-48	C6-20GO-48	48	57	9	9 1/2	17 1/16	19 1/16	50 5/8	50 5/16	14 7/8	15 3/8	59	5/8	5/16	7 1/2	9 1/2	92	110
	C5-20GO-54	C6-20GO-54	54	63	9	9 1/2	19 1/16	21 1/16	56 3/8	56 1/16	15 5/8	16 1/16	65	5/8	3/8	9	11	106	126
	C5-20GO-60	C6-20GO-60	60	69	9	9 1/2	21 1/16	23 5/16	62 3/16	61 13/16	16 5/16	16 3/4	71 1/2	5/8	3/8	9	11	117	138
	C5-35GO-18	C6-35GO-18	18	27	8 1/2	9	7 1/16	9 1/6	19 1/2	18 15/16	12 5/8	13 1/16	29	1/2	1/4	6	8	45	54
	C5-35GO-24	C6-35GO-24	24	33	8 1/2	9	9 1/16	11 1/16	24 3/4	24 1/4	13 13/16	14 3/16	35	5/8	5/16	6	9 1/2	53	64
	C5-35GO-30	C6-35GO-30	30	39	8 1/2	9	11 1/16	13 1/6	30 1/16	29 1/2	14 15/16	15 1/4	41	5/8	5/16	6	9 1/2	63	76
35°	C5-35GO-36	C6-35GO-36	36	45	8 1/2	9	13 1/16	15 1/6	35 5/16	34 13/16	16 1/8	16 1/2	47	5/8	5/16	6	9 1/2	71	85
33	C5-35GO-42	C6-35GO-42	42	51	9	9 1/2	15 1/16	17 1/16	40 5/16	40 1/16	17 11/16	18 1/8	53	5/8	5/16	7 1/2	9 1/2	87	104
	C5-35GO-48	C6-35GO-48	48	57	9	9 1/2	17 1/16	19 1/16	45 7/8	45 5/16	18 7/8	19 1/4	59	5/8	5/16	7 1/2	9 1/2	95	114
	C5-35GO-54	C6-35GO-54	54	63	9	9 1/2	19 1/16	21 1/16	51 3/16	50 5/16	20	20 7/16	65	5/8	3/8	9	11	109	130
	C5-35GO-60	C6-35GO-60	60	69	9	9 1/2	21 1/16	23 5/16	56 7/16	55 7/8	21 3/16	21 9/16	71 1/2	5/8	3/8	9	11	121	142
	C5-45GO-18	C6-45GO-18	18	27	8 1/2	9	7 1/16	9 1/6	18 1/8	17 7/16	13 5/8	14	29	1/2	1/4	6	8	47	55
	C5-45GO-24	C6-45GO-24	24	33	8 1/2	9	9 1/16	11 1/16	2215/16	22 1/4	15 1/16	15 7/16	35	5/8	5/16	6	9 1/2	55	65
	C5-45GO-30	C6-45GO-30	30	39	8 1/2	9	11 1/16	13 1/6	27 3/4	27 1/16	16 1/2	16 7/8	41	5/8	5/16	6	9 1/2	65	78
45°	C5-45GO-36	C6-45GO-36	36	45	8 1/2	9	13 1/16	15 1/6	32 9/16	31 15/16	1715/16	18 1/4	47	5/8	5/16	6	9 1/2	73	87
43	C5-45GO-42	C6-45GO-42	42	51	9	9 1/2	15 1/16	17 1/16	37 4/9	36 3/4	18 3/4	20 1/8	53	5/8	5/16	7 1/2	9 1/2	89	105
	C5-45GO-48	C6-45GO-48	48	57	9	9 1/2	17 1/16	19 1/16	42 1/4	41 9/16	21 3/16	21 9/16	59	5/8	5/16	7 1/2	9 1/2	97	116
	C5-45GO-54	C6-45GO-54	54	63	9	9 1/2	19 1/16	21 1/16	47 1/16	46 3/8	22 5/8	23	65	5/8	3/8	9	11	114	135
	C5-45GO-60	C6-45GO-60	60	69	9	9 1/2	21 1/16	23 5/16	51 7/8	51 1/4	24 1/16	24 3/8	71 1/2	5/8	3/8	9	11	124	145


### FEEDER / PICKING TROUGHING IDLERS - 4" & 5" & 6" DIAMETER

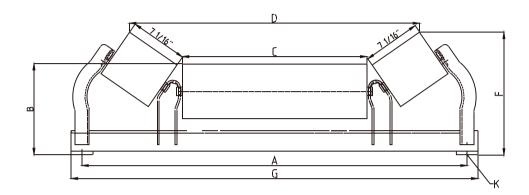




	PART NUMBER	BW	Α	В	С	D	E	F	G	Н	J	K	WT
	C4-20P-24	24	33	7 15/16	13	28 3/16	5/16	10 7/16	35	6	9 1/2	5/8	40
	C4-20P-30	30	39	7 15/16	19	34 3/16	5/16	10 7/16	41	6	9 1/2	5/8	48
	C4-20P-36	36	45	7 15/16	25	40 3/16	5/16	10 7/16	47	6	9 1/2	5/8	53
4"	C4-20P-42	42	51	8 5/16	30 3/4	43 3/8	5/16	10 1/2	53	6	9 1/2	5/8	66
	C4-20P-48	48	57	8 5/16	36 3/4	52 3/8	5/16	10 1/2	59	6	9 1/2	5/8	73
	C4-20P-54	54	63	8 3/4	42 1/2	58 7/16	3/8	10 9/16	65 1/2	9	11	5/8	84
	C4-20P-60	60	69	8 3/4	48 1/2	64 7/16	3/8	10 9/16	71 1/2	9	11	5/8	94
	C5-20P-24	24	33	8 7/16	13	27 5/8	5/16	10 7/8	35	6	9 1/2	5/8	47
	C5-20P-30	30	39	8 7/16	19	33 5/8	5/16	10 7/8	41	6	9 1/2	5/8	56
	C5-20P-36	36	45	8 7/16	25	39 5/8	5/16	10 7/8	47	6	9 1/2	5/8	63
5"	C5-20P-42	42	51	8 13/16	30 3/4	45 13/16	5/16	10 15/16	53	6	9 1/2	5/8	78
	C5-20P-48	48	57	8 13/16	36 3/4	51 13/16	5/16	10 15/16	59	6	9 1/2	5/8	86
	C5-20P-54	54	63	8 7/8	42 1/2	57 13/16	3/8	11	65 1/2	9	11	5/8	98
	C5-20P-60	60	69	8 7/8	48 1/2	63 13/16	3/8	11	71 1/2	9	11	5/8	109
	C6-20P-24	24	33	8 15/16	13	27 9/16	5/16	11 3/8	35	6	9 1/2	5/8	56
	C6-20P-30	30	39	8 15/16	19	33 9/16	5/16	11 3/8	41	6	9 1/2	5/8	67
	C6-20P-36	36	45	8 15/16	25	39 9/16	5/16	11 3/8	47	6	9 1/2	5/8	76
6"	C6-20P-42	42	51	9 5/16	30 3/4	45 9/16	5/16	11 7/16	53	6	9 1/2	5/8	92
	C6-20P-48	48	57	9 5/16	36 3/4	51 13/16	5/16	11 7/16	59	6	9 1/2	5/8	101
	C6-20P-54	54	63	9 3/8	42 1/2	57 13/16	3/8	11 1/2	65 1/2	9	11	5/8	116
	C6-20P-60	60	69	9 3/8	48 1/2	63 13/16	3/8	11 1/2	71 1/2	9	11	5/8	129


### TROUGHING IDLERS (EQUAL LENGTH ROLLERS) - 5" & 6" DIAMETER

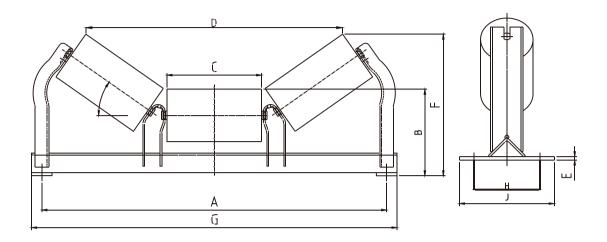

	PART	NUMBER	вw	Α	E	3	С		)	E		F	G	Н	J	к	V	VΤ
	5''	6"	D**	^	5"	6''	O	5"	6"	_	5''	6''		"		, K	5"	6"
	D5-20E-24	D6-20E-24	24	33	8 1/2	9	9 1/16	27 5/8	26 15/16	5/16	11 11/16	12 1/8	35	6	9 1/2	5/8	51	64
	D5-20E-30	D6-20E-30	30	39	8 1/2	9	11 1/16	33 1/16	32 3/4	5/16	12 3/8	12 7/8	41	6	9 1/2	5/8	63	76
	D5-20E-36	D6-20E-36	36	45	9	9 1/2	13 1/16	38 13/16	38 1/2	5/16	13 1/16	14 1/32	47	6	9 1/2	5/8	72	86
20°	D5-20E-42	D6-20E-42	42	51	9	9 1/2	15 1/16	44 9/16	44 1/4	5/16	14 3/16	14 3/4	53	7 1/2	9 1/2	5/8	87	104
20	D5-20E-48	D6-20E-48	48	57	9 3/8	9 7/8	17 1/16	50 3/8	50	5/16	14 7/8	15 3/4	59	7 1/2	9 1/2	5/8	96	115
	D5-20E-54	D6-20E-54	54	63	9 7/16	9 15/16	19 1/16	56 1/8	55 3/4	3/8	15 5/8	16 1/2	65 1/2	9	11	5/8	109	130
	D5-20E-60	D6-20E-60	60	69	9 7/16	9 15/16	21 1/16	62 1/8	61 1/2	3/8	16 9/16	17 3/16	71 1/2	9	11	5/8	123	144
	D5-20E-72	D6-20E-72	72	81	9 7/16	9 15/16	25 1/16	73 3/8	73	3/8	18 1/8	18 9/16	83 1/2	9	11	5/8	144	167
	D5-35E-24	D6-35E-24	24	33	8 1/2	9	9 1/16	24 11/16	24 1/8	5/16	13 13/16	14 3/16	35	6	9 1/2	5/8	55	66
	D5-35E-30	D6-35E-30	30	39	8 1/2	9	11 1/16	30	29 7/16	5/16	14 15/16	15 3/8	41	6	9 1/2	5/8	66	78
	D5-35E-36	D6-35E-36	36	45	9	9 1/2	13 1/16	35 1/4	34 11/16	5/16	16 1/8	16	47	6	9 1/2	5/8	74	88
35°	D5-35E-42	D6-35E-42	42	51	9	9 1/2	15 1/16	40 9/16	40	5/16	17 11/16	18 3/16	53	7 1/2	9 1/2	5/8	90	106
33	D5-35E-48	D6-35E-48	48	57	9 3/8	9 7/8	17 1/16	45 13/16	45 1/4	5/16	18 7/8	19 11/16	59	7 1/2	9 1/2	5/8	99	117
	D5-35E-54	D6-35E-54	54	63	9 7/16	9 15/16	19 1/16	51 1/8	50 1/2	3/8	20 5/16	20 7/8	65 1/2	9	11	5/8	113	134
	D5-35E-60	D6-35E-60	60	69	9 7/16	9 15/16	21 1/16	56 5/16	55 13/16	3/8	21 3/16	22	71 1/2	9	11	5/8	126	148
	D5-35E-72	D6-35E-72	72	81	9 7/16	9 15/16	25 1/16	66 7/8	66 5/16	3/8	23 15/16	24 5/16	83 1/2	9	11	5/8	145	171
	D5-45E-24	D6-45E-24	24	33	8 1/2	9	9 1/16	22 3/4	22 1/6	5/16	15 1/16	15 7/16	35	6	9 1/2	5/8	57	68
	D5-45E-30	D6-45E-30	30	39	8 1/2	9	11 1/16	27 5/8	26 7/8	5/16	16 1/2	16 7/8	41	6	9 1/2	5/8	67	80
	D5-45E-36	D6-45E-36	36	45	9	9 1/2	13 1/16	32 7/16	31 3/4	5/16	17 15/16	18 3/4	47	6	9 1/2	5/8	75	90
45°	D5-45E-42	D6-45E-42	42	51	9	9 1/2	15 1/16	37 1/4	36 9/16	5/16	19 3/4	20 3/16	53	7 1/2	9 1/2	5/8	94	111
45	D5-45E-48	D6-45E-48	48	57	9 3/8	9 7/8	17 1/16	42 1/8	41 3/8	5/16	21 1/8	21 15/16	59	7 1/2	9 1/2	5/8	101	119
	D5-45E-54	D6-45E-54	54	63	9 7/16	9 15/16	19 1/16	46 15/16	46 3/16	3/8	22 15/16	23 1/4	65 1/2	9	11	5/8	116	138
	D5-45E-60	D6-45E-60	60	69	9 7/16	9 15/16	21 1/16	51 3/4	51	3/8	24 1/16	24 7/8	71 1/2	9	11	5/8	133	151
	D5-45E-72	D6-45E-72	72	81	9 7/16	9 15/16	25 1/16	61 3/8	60 11/16	3/8	27 5/16	27 11/16	83 1/2	9	11	5/8	154	174


### RETURN IDLERS - 5" & 6" DIAMETER

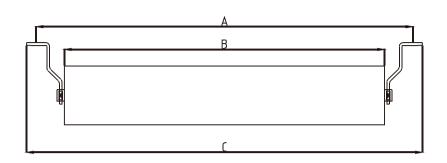




5" PART	6" PART	BW"	^	В	С	W	<b>/</b> T
NUMBER	NUMBER	DAA	Α	Б		5"	6"
D5-RET-24	D6-RET-24	24	33	27 5/16	34 3/4	30	40
D5-RET-30	D6-RET-30	30	39	33 5/16	40 3/4	36	47
D5-RET-36	D6-RET-36	36	5	39 5/16	46 3/4	41	54
D5-RET-42	D6-RET-42	42	51	45 5/16	52 3/4	46	61
D5-RET-48	D6-RET-48	48	57	51 5/16	58 3/4	51	68
D5-RET-54	D6-RET-54	54	63	57 5/16	64 3/4	56	75
D5-RET-60	D6-RET-60	60	69	63 5/16	70 3/4	61	83
D5-RET-72	D6-RET-72	72	81	75 5/16	82 3/4	72	97


### FLAT IDLERS - 5" & 6" DIAMETER

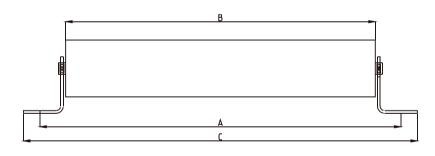




5" PART	6" PART	BW"	Α	В	С	W	/T
NUMBER	NUMBER	DAA	A	В		5"	6"
D5-FLT-24	D6-FLT-24	24	33	27 5/16	34 3/4	33	42
D5-FLT-30	D6-FLT-30	30	39	33 5/16	40 3/4	38	49
D5-FLT-36	D6-FLT-36	36	5	39 5/16	46 3/4	43	57
D5-FLT-42	D6-FLT-42	42	51	45 5/16	52 3/4	48	64
D5-FLT-48	D6-FLT-48	48	57	51 5/16	58 3/4	54	71
D5-FLT-54	D6-FLT-54	54	63	57 5/16	64 3/4	59	78
D5-FLT-60	D6-FLT-60	60	69	63 5/16	70 3/4	64	85
D5-FLT-72	D6-FLT-72	72	81	75 5/16	82 3/4	74	99


### RUBBER CUSHION IMPACT TROUGHING IDLERS - 5" & 6" DIAMETER

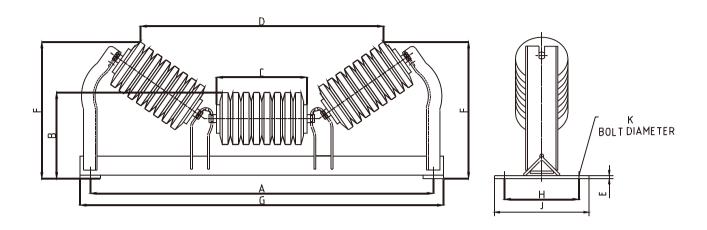

	PART	NUMBER	BW	Α	ı	В	С		)	Е	ı	=	G	н	J	К	W	/T
	5"	6"	D V V	^	5"	6"		5"	6"	_	5"	6"			3	TX.	5"	6"
	D5-20El-24	D6-20EI-24	24	33	8 1/2	9	9 1/16	26 13/16	26 7/16	5/16	11 11/16	12 1/8	35	6	9 1/2	5/8	53	65
	D5-20EI-30	D6-20EI-30	30	39	8 1/2	9	11 1/16	32 9/16	32 1/4	5/16	12 3/8	12 7/8	41	6	9 1/2	5/8	71	78
	D5-20EI-36	D6-20EI-36	36	45	9	9 1/2	13 1/16	38 5/16	38	5/16	13 9/16	14 1/32	47	6	9 1/2	5/8	83	94
20°	D5-20EI-42	D6-20EI-42	42	51	9	9 1/2	15 1/16	44 1/16	43 3/4	5/16	14 1/4	14 3/4	53	7 1/2	9 1/2	5/8	106	116
20	D5-20EI-48	D6-20EI-48	48	57	9 3/8	9 7/8	17 1/16	49 7/8	49 1/2	5/16	15 5/16	15 3/4	59	7 1/2	9 1/2	5/8	120	131
	D5-20EI-54	D6-20EI-54	54	63	9 7/16	9 15/16	19 1/16	55 5/8	55 1/4	3/8	16 1/32	16 1/2	65 1/2	9	11	5/8	130	142
	D5-20EI-60	D6-20EI-60	60	69	9 7/16	9 15/16	21 1/16	61 3/8	61	3/8	16 3/4	17 3/16	71 1/2	9	11	5/8	145	152
	D5-20EI-72	D6-20EI-72	72	81	9 7/16	9 15/16	25 1/16	73	72 11/16	3/8	17 9/16	18 1/16	83 1/2	9	11	5/8	160	164
	D5-35EI-24	D6-35EI-24	24	33	8 1/2	9	9 1/16	24 5/16	23 3/4	5/16	11 11/16	14 3/16	35	6	9 1/2	5/8	60	68
	D5-35EI-30	D6-35EI-30	30	39	8 1/2	9	11 1/16	29 5/8	29 1/16	5/16	12 3/8	15 3/8	41	6	9 1/2	5/8	72	81
	D5-35EI-36	D6-35EI-36	36	45	9	9 1/2	13 1/16	34 7/8	34 5/16	5/16	16 5/8	16	47	6	9 1/2	5/8	85	96
35°	D5-35El-42	D6-35EI-42	42	51	9	9 1/2	15 1/16	40 3/16	39 5/8	5/16	17 3/4	18 3/16	53	7 1/2	9 1/2	5/8	108	118
33	D5-35EI-48	D6-35EI-48	48	57	9 3/8	9 7/8	17 1/16	45 7/16	44 7/8	5/16	19 1/4	19 11/16	59	7 1/2	9 1/2	5/8	123	133
	D5-35EI-54	D6-35EI-54	54	63	9 7/16	9 15/16	19 1/16	69 15/16	49 15/16	3/8	20 1/16	20 7/16	65 1/2	9	11	5/8	132	145
	D5-35EI-60	D6-35EI-60	60	69	9 7/16	9 15/16	21 1/16	56	55 7/16	3/8	21 5/8	22	71 1/2	9	11	5/8	148	157
	D5-35EI-72	D6-35EI-72	72	81	9 7/16	9 15/16	25 1/16	65 1/2	64 15/16	3/8	24 3/16	24 11/16	83 1/2	9	11	5/8	164	172
	D5-45EI-24	D6-45EI-24	24	33	8 1/2	9	9 1/16	22 3/4	21 11/16	5/16	15 1/16	15 7/16	35	6	9 1/2	5/8	51	70
	D5-45EI-30	D6-45El30	30	39	8 1/2	9	11 1/16	27 5/8	26 1/2	5/16	16 1/8	16 7/8	41	6	9 1/2	5/8	60	81
	D5-45EI-36	D6-45EI-36	36	45	9	9 1/2	13 1/16	32 7/16	32 1/16	5/16	18 7/16	18 3/4	47	6	9 1/2	5/8	67	98
45°	D5-45El-42	D6-45El42	42	51	9	9 1/2	15 1/16	37 1/4	36 3/16	5/16	19 13/16	20 3/16	53	7 1/2	9 1/2	5/8	89	120
45	D5-45EI-48	D6-45EI48	48	57	9 3/8	9 7/8	17 1/16	42 1/16	41	5/16	21 5/8	21 15/16	59	7 1/2	9 1/2	5/8	96	136
	D5-45EI-54	D6-45EI54	54	63	9 7/16	9 15/16	19 1/16	46 15/16	45 13/16	3/8	23 1/16	23 7/16	65 1/2	9	11	5/8	107	148
	D5-45EI-60	D6-45EI60	60	69	9 7/16	9 15/16	21 1/16	51 3/4	50 9/16	3/8	24 1/2	24 7/8	71 1/2	9	11	5/8	116	159
	D5-45EI-72	D6-45EI72	72	81	9 7/16	9 15/16	25 1/16	61 3/8	60 7/16	3/8	27 5/16	27 15/16	83 1/2	9	11	5/8	133	174


### RUBBER CUSHION RETURN IDLERS - 5" & 6" DIAMETER

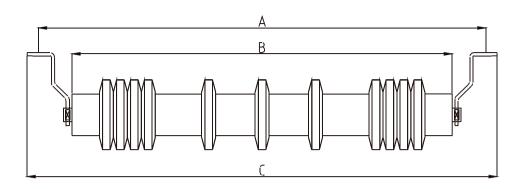




PART I	NUMBER	BW	Α	В	С	W	<b>/</b> T
5"	6"	DVV	A	ь	C	5"	6"
D5-RETI-24	D6-RETI-24	24	33	27 7/16	34 1/2	33	39
D5-RETI-30	D6-RETI-30	30	39	33 7/16	40 1/2	39	43
D5-RETI-36	D6-RETI-36	36	45	39 7/16	46 1/2	43	50
D5-RETI-42	D6-RETI-42	42	51	45 7/16	52 1/2	46	53
D5-RETI-48	D6-RETI-48	48	57	51 7/16	58 1/2	53	60
D5-RETI-54	D6-RETI-54	54	63	57 7/16	64 1/2	58	64
D5-RETI-60	D6-RETI-60	60	69	63 7/16	70 1/2	63	68
D5-RETI-72	D6-RETI-72	72	81	75 7/16	82 1/2	79	73

### RUBBER CUSHION FLAT IDLERS - 5" & 6" DIAMETER

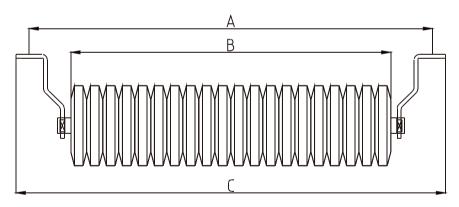





PART I	NUMBER	BW	Α	В	С	W	/T
5"	6"	DVV	A	В	C	5"	6"
D5-FLTI-24	D6-FLTI-24	24	33	27 7/16	34 15/16	45	52
D5-FLTI-30	D6-FLTI-30	30	39	33 7/16	40 15/16	53	62
D5-FLTI-36	D6-FLTI-36	36	45	39 7/16	46 15/16	61	71
D5-FLTI-42	D6-FLTI-42	42	51	45 7/16	52 15/16	69	81
D5-FLTI-48	D6-FLTI-48	48	57	51 7/16	58 15/16	78	92
D5-FLTI-54	D6-FLTI-54	54	63	57 7/16	64 15/16	86	101
D5-FLTI-60	D6-FLTI-60	60	69	63 7/16	70 15/16	94	111
D5-FLTI-72	D6-FLTI-72	72	81	75 7/16	82 15/16	111	130




### SELF-ALIGNING TROUGHING IDLER - 5" & 6" DIAMETER

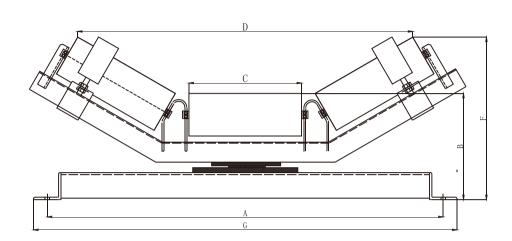




	PARTI	NUMBER	BW	Α		В	С	I	)	Е		F	G	н	J	К	V	VT
	5"	6"	DW	^	5"	6"		5"	6"		5"	6"		"	3	K	5"	6"
	D5-20EA-24	D6-20EA-24	24	33	9 3/8	9 7/8	9 1/16	21 5/8	21 5/16	30 5/8	11 7/8	12 5/16	28 7/8	6	11 1/2	5/8	89	93
	D5-20EA-30	D6-20EA-30	30	39	9 3/8	9 7/8	11 1/16	27 3/8	27 1/16	36 5/8	12 9/16	13	34 7/8	6	11 1/2	5/8	107	105
	D5-20EA-36	D6-20EA-36	36	45	9 7/16	9 15/16	13 1/16	33 1/8	32 13/16	42 3/16	13 5/16	13 3/4	40 7/8	6	11 1/2	5/8	118	122
20°	D5-20EA-42	D6-20EA-42	42	51	9 7/16	9 15/16	15 1/16	38 7/8	38 9/16	47 15/16	14	14 7/16	46 7/8	6	11 1/2	5/8	140	146
20	D5-20EA-48	D6-20EA-48	48	57	9 13/16	10 5/16	17 1/16	44 5/8	44 5/16	53 15/16	15 1/16	15 1/2	52 7/8	6	11 1/2	5/8	165	172
	D5-20EA-54	D6-20EA-54	54	63	9 13/16	10 5/16	19 1/16	50 3/8	50 1/16	59 1/16	15 3/4	16 3/16	58 7/8	6	11 1/2	5/8	178	183
	D5-20EA-60	D6-20EA-60	60	69	9 15/16	10 7/16	21 1/16	56 1/8	55 13/16	65 7/16	16 9/16	17	64 7/8	6	11 1/2	5/8	192	199
	D5-20EA-72	D6-20EA-72	72	81	9 15/16	10 7/16	25 1/16	61 15/16	61 9/16	71 3/16	17 1/4	17 11/16	70 7/8	6	11 1/2	5/8	202	211
	D5-35EA-24	D6-35EA-24	24	33	9 3/8	9 7/8	9 1/16	24 11/16	24 1/8	38 3/16	14 7/8	15 1/4	28 7/8	6	11 1/2	5/8	91	93
	D5-35EA-30	D6-35EA-30	30	39	9 3/8	9 7/8	11 1/16	30	29 7/16	44 3/16	15 7/8	16 7/16	34 7/8	6	11 1/2	5/8	109	109
	D5-35EA-36	D6-35EA-36	36	45	9 7/16	9 15/16	13 1/16	35 1/4	34 11/16	48 15/16	17 3/16	17 9/16	40 7/8	6	11 1/2	5/8	120	124
35°	D5-35EA-42	D6-35EA-42	42	51	9 7/16	9 15/16	15 1/16	40 9/16	40	55	18 3/4	19 3/16	46 7/8	6	11 1/2	5/8	142	146
33	D5-35EA-48	D6-35EA-48	48	57	9 13/16	10 5/16	17 1/16	45 13/16	45 1/4	60 5/8	20	20 5/16	52 7/8	6	11 1/2	5/8	167	173
	D5-35EA-54	D6-35EA-54	54	63	9 13/16	10 5/16	19 1/16	51 1/8	50 1/2	65 9/16	21 1/16	21 1/2	58 7/8	6	11 1/2	5/8	180	186
	D5-35EA-60	D6-35EA-60	60	69	9 15/16	10 7/16	21 1/16	56 5/16	55 13/16	70 9/16	22 1/4	22 5/8	64 7/8	6	11 1/2	5/8	194	200
	D5-35EA-72	D6-35EA-72	72	81	9 15/16	10 7/16	25 1/16	66 7/8	61 1/8	82 3/4	22 7/16	24 3/8	70 7/8	6	11 1/2	5/8	204	210
	D5-45EA-24	D6-45EA-24	24	33	9 3/8	9 7/8	9 1/16	22 3/4	22 1/16	36 13/16	16 1/8	16 1/2	28 7/8	6	11 1/2	5/8	92	94
	D5-45EA-30	D6-45EA-30	30	39	9 3/8	9 7/8	11 1/16	27 5/8	26 7/8	43 5/16	17 5/8	18	34 7/8	6	11 1/2	5/8	110	113
	D5-45EA-36	D6-45EA-36	36	45	9 7/16	9 15/16	13 1/16	32 7/16	31 3/4	49 11/16	19 1/16	19 3/8	40 7/8	6	11 1/2	5/8	121	125
45°	D5-45EA-42	D6-45EA-42	42	51	9 7/16	9 15/16	15 1/16	37 1/4	36 9/16	54	20 3/4	21 1/8	46 7/8	6	11 1/2	5/8	143	148
45	D5-45EA-48	D6-45EA-48	48	57	9 13/16	10 5/16	17 1/16	42 1/16	41 3/8	59 1/8	22 3/16	21 7/8	52 7/8	6	11 1/2	5/8	169	175
	D5-45EA-54	D6-45EA-54	54	63	9 13/16	10 5/16	19 1/16	46 15/16	46 3/16	63 3/4	23 5/8	24	58 7/8	6	11 1/2	5/8	185	187
	D5-45EA-60	D6-45EA-60	60	69	9 15/16	10 7/16	21 1/16	51 3/4	51	68 5/16	25	25 3/8	64 7/8	6	11 1/2	5/8	196	201
	D5-45EA-72	D6-45EA-72	72	81	9 15/16	10 7/16	25 1/16	61 3/8	72 7/8	80 3/4	26 5/8	26 7/8	70 7/8	6	11 1/2	5/8	206	211


### SELF-ALIGNING RETURN IDLERS - 5" & 6" DIAMETER

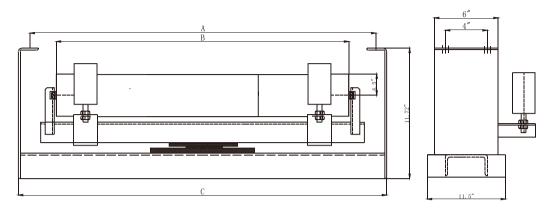

PART NUM	/IBER	BW	А	В	С	D	WT	
5"	6"	DVV	^	P		, b	5"	6''
D5-RETA-24	D6-RETA-24	24	33	27 5/16	35 3/4	29 5/8	78	88
D5-RETA-30	D6-RETA-30	30	39	33 5/16	41 3/4	35 5/8	105	116
D5-RETA-36	D6-RETA-36	36	45	39 5/16	47 3/4	41 5/8	109	122
D5-RETA-42	D6-RETA-42	42	51	45 5/16	53 3/4	47 5/8	139	154
D5-RETA-48	D6-RETA-48	48	57	51 5/16	59 3/4	53 5/8	147	164
D5-RETA-54	D6-RETA-54	54	63	57 5/16	65 3/4	59 5/8	158	177
D5-RETA-60	D6-RETA-60	60	69	63 5/16	71 3/4	65 5/8	171	193
D5-RETA-72	D6-RETA-72	72	81	75 5/16	83 3/4	77 5/8	197	222

### FEEDER / PICKING TROUGHING IDLERS - 5" & 6" DIAMETER

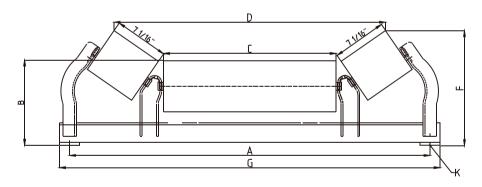





	PART NUMBER	BW	Α	В	С	D	Е	F	G	Н	J	к	WT
	D5-20P-24	24	33	8 1/2	13	27 13/16	5/16	11	20	6	9 1/2	5/8	53
	D5-20P-30	30	39	8 9/16	19	33 4/5	5/16	11	41	6	9 1/2	5/8	65
	D5-20P-36	36	45	8 9/16	25	39 13/16	5/16	11	47	6	9 1/2	5/8	70
5"	D5-20P-42	42	51	8 15/16	30 3/4	46	5/16	11 1/16	53	6	9 1/2	5/8	85
5	D5-20P-48	48	57	8 15/16	36 3/4	52	5/16	11 1/16	59	6	9 1/2	5/8	94
	D5-20P-54	54	63	9 5/16	42 1/2	58 1/8	3/8	11 1/8	65 1/2	9	11	5/8	107
	D5-20P-60	60	69	9 5/16	48 1/2	64 1/8	3/8	11 1/8	71 1/2	9	11	5/8	118
	D5-20P-72	72	81	9 5/16	60 1/2	76 1/8	3/8	11 1/8	83 1/2	9	11	5/8	140
	D6-20P-24	24	33	9	13	27 1/2	5/16	11 7/16	35	6	9 1/2	1/2	63
	D6-20P-30	30	39	9 1/16	19	33 1/2	5/16	11 7/16	41	6	9 1/2	1/2	74
	D6-20P-36	36	45	9 1/16	25	39 1/2	5/16	11 7/16	47	6	9 1/2	1/2	83
6"	D6-20P-42	42	51	9 7/16	30 3/4	45 3/4	5/16	11 9/16	53	6	9 1/2	5/8	100
Ь	D6-20P-48	48	57	9 7/16	36 3/4	51 3/4	5/16	11 9/16	59	6	9 1/2	5/8	110
	D6-20P-54	54	63	9 13/16	42 1/2	58	3/8	11 11/16	65 1/2	9	11	5/8	125
	D6-20P-60	60	69	9 13/16	48 1/2	64	3/8	11 11/16	71 1/2	9	11	5/8	138
	D6-20P-72	72	81	9 13/16	60 1/2	76	3/8	11 11/16	83 1/2	9	11	5/8	174

Office Address: No. 18, Powerlong Building, Qingdao, China; Tel: +86 532 55780186 Fax: +86 532 55780187, Phone: +86-18724717692

Email: sales@monsterbelting.com , www.monsterbelting.com


### TROUGHING IDLER (UNEQUAL LENGTH ROLLERS) - 5" & 6" DIAMETER

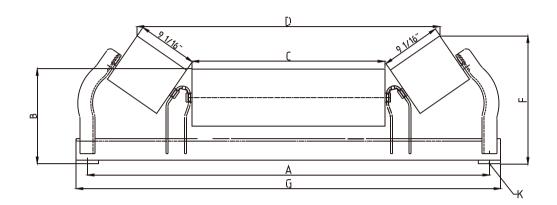




	35° PART	45° PART	BW	А	В	(	С	I	)	Е	F	:	G	н	J	к	V	/T
	NUMBER	NUMBER	DVV	^	_ B	35°	45°	35°	45°		35°	45°	9	п	"		35°	45°
	D5-35U-30	D5-45U-30	30	39	8 1/2	15 1/16	15 1/16	30 3/4	28 3/4	5/16	13 3/4	15 1/16	41	6	9 1/2		65	66
	D5-35U-36	D5-45U-36	36	45	8 1/2	21 1/3	21 1/3	37 1/16	35 1/8	5/16	13 3/4	15 1/16	47	6	9 1/2		72	73
	D5-35U-42	D5-45U-42	42	51	9	26 5/8	26 5/8	43 1/16	41 1/8	5/16	13 3/4	15 1/8	53	6	9 1/2		87	88
5"	D5-35U-48	D5-45U-48	48	57	9	32 3/8	32 3/8	49 1/16	47 1/8	5/16	13 3/4	15 1/8	59	6	9 1/2		95	96
	D5-35U-54	D5-45U-54	54	63	9 7/16	38 1/8	37 11/16	55 1/16	53 1/8	3/8	13 7/8	15 1/4	65	9	11		108	112
	D5-35U-60	D5-45U-60	60	69	9 7/16	44 1/8	43 11/16	61 1/16	59 1/9	3/8	13 15/16	15 1/4	71 1/2	9	11		120	121
	D5-35U-72	D5-45U-72	72	81	9 5/16	56 1/8	55 11/16	73	71 1/16	3/8	13 15/16	15 1/4	83 1/2	9	11		137	138
	D6-35U-30	D6-45U-30	30	39	9	15 1/16	15 1/16	30 1/8	28 1/16	5/16	14 1/4	15 7/16	41	6	9 1/2		77	79
	D6-35U-36	D6-45U-36	36	45	9	21 1/3	21 1/3	36 1/2	34 3/8	5/16	14 1/4	15 7/16	47	6	9 1/2		86	88
	D6-35U-42	D6-45U-42	42	51	9 1/2	26 5/8	26 5/8	42 1/2	40 3/8	5/16	14 1/4	15 1/2	53	6	9 1/2		102	103
6"	D6-35U-48	D6-45U-48	48	57	9 1/2	32 3/8	32 3/8	48 1/2	46 3/8	5/16	14 1/4	15 1/2	59	6	9 1/2		112	113
	D6-35U-54	D6-45U-54	54	63	9 15/16	38 1/8	37 11/16	54 1/2	52 3/8	3/8	14 5/16	15 5/8	65	9	11		127	130
	D6-35U-60	D6-45U-60	60	69	9 15/16	44 1/8	43 11/16	60 1/2	58 3/8	3/8	14 3/8	15 5/8	71 1/2	9	11		140	141
	D6-35U-72	D6-45U-72	72	81	9 15/16	56 1/8	55 11/16	72 1/2	70 1/2	3/8	14 3/8	15 5/8	83 1/2	9	11		161	161


### TROUGHING IDLER (EQUAL LENGTH ROLLERS) - 6" & 7" DIAMETER

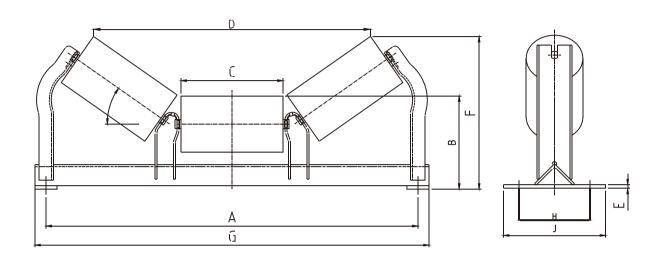

	PART	NUMBER	вw	Α	В	3	С		D	Е	F		G	н	J	к	٧	VT
	6"	7''	DVV	^	6"	7''	C	6''	7''	_	6''	7''	G	"	J	N.	6"	7"
	E6-20E-36	E7-20E-36	36	45	10 3/4	11 1/4	12 3/4	39 7/8	40 5/16	1/2	15 3/8	15 11/16	47 1/2	9 1/2	12	3/4	157	169
	E6-20E-42	E7-20E-42	42	51	10 3/4	11 1/4	14 3/4	45 5/8	46 1/16	1/2	16 3/16	16 1/2	53 1/2	9 1/2	12	3/4	174	187
	E6-20E-48	E7-20E-48	48	57	10 3/4	11 1/4	17 1/2	53 5/16	53 3/4	1/2	16 15/16	17 1/4	59 1/2	9 1/2	12	3/4	197	211
20°	E6-20E-54	E7-20E-54	54	63	10 3/4	11 1/4	19 1/2	59 1/8	59 9/16	1/2	17 5/8	17 15/16	65 1/2	9 1/2	12	3/4	213	228
20	E6-20E-60	E7-20E-60	60	69	10 3/4	11 1/4	21 1/2	65 1/16	65 1/2	1/2	18 3/8	18 11/16	71 1/2	9 1/2	12	3/4	229	246
	E6-20E-72	E7-20E-72	72	81	11 1/2	12	25 1/2	76 3/8	76 13/16	1/2	20 7/16	20 3/4	83 1/2	9 1/2	12	3/4	264	283
	E6-20E-84	E7-20E-84	84	93	11 3/4	12 1/4	29 1/2	88 1/6	88 1/2	1/2	22 1/16	22 3/8	95 1/2	12	14	3/4	297	319
	E6-20E-96	E7-20E-96	96	105	11 3/4	12 1/4	33 1/2	99 5/8	100 1/16	1/2	23 7/16	23 3/4	107 1/2	12	14	3/4	330	355
	E6-35E-36	E7-35E-36	36	45	10 3/4	11 1/4	12 3/4	35 7/8	36 5/16	1/2	18 1/4	18 9/16	47 1/2	9 1/2	12	3/4	164	174
	E6-35E-42	E7-35E-42	42	51	10 3/4	11 1/4	14 3/4	41 3/16	41 5/8	1/2	19 3/8	19 11/16	53 1/2	9 1/2	12	3/4	180	193
	E6-35E-48	E7-35E-48	48	57	10 3/4	11 1/4	17 1/2	48 7/16	48 7/8	1/2	21	21 5/16	59 1/2	9 1/2	12	3/4	203	218
35°	E6-35E-54	E7-35E-54	54	63	·	11 1/4	19 1/2	53 3/4	54 3/16	1/2	22 1/8	22 7/16	65 1/2	9 1/2	12	3/4	220	236
33	E6-35E-60	E7-35E-60	60	69	10 3/4	11 1/4	21 1/2	59	59 7/16	1/2	23 1/4	23 9/16	71 1/2	9 1/2	12	3/4	237	254
	E6-35E-72	E7-35E-72	72	81	11 1/2	12	25 1/2	69 1/2	69 15/16	1/2	26 3/16	16 1/2	83 1/2	9 1/2	12	3/4	273	292
	E6-35E-84	E7-35E-84	84	93	11 3/4	12 1/4	29 1/2	79 11/16	C 1/8	1/2	29 1/16	29 3/8	95 1/2	12	14	3/4	307	329
	E6-35E-96	E7-35E-96	96	105	11 3/4	12 1/4	33 1/2	90 5/8	D 1/16	1/2	31 1/8	21 7/16	107 1/2	12	14	3/4	341	366
	E6-45E-36	E7-45E-36	36	45	10 3/4	11 1/4	12 3/4	32 3/8	32 13/16	1/2	19 7/8	20 3/16	47 1/2	9 1/2	12	3/4	167	179
	E6-45E-42	E7-45E-42	42	51	10 3/4	11 1/4	14 3/4	37 3/16	37 5/8	1/2	21 5/16	21 5/8	53 1/2	9 1/2	12	3/4	185	198
	E6-45E-48	E7-45E-48	48	57	10 3/4	11 1/4	17 1/2	43 13/16	44 1/4	1/2	23 1/4	23 9/16	59 1/2	9 1/2	12	3/4	209	224
45°	E6-45E-54	E7-45E-54	54	63	10 3/4	11 1/4	19 1/2	48 5/8	49 1/16	1/2	24 5/8	24 15/16	65 1/2	9 1/2	12	3/4	226	242
70	E6-45E-60	E7-45E-60	60	69	10 3/4	11 1/4	21 1/2	53 1/2	53 15/16	1/2	26 1/16	26 3/8	71 1/2	9 1/2	12	3/4	243	20
	E6-45E-72	E7-45E-72	72	81	11 1/2	12	25 1/2	63 1/8	63 9/16	1/2	29 5/8	29 15/16	83 1/2	9 1/2	12	3/4	280	299
	E6-45E-84	E7-45E-84	84	93	11 3/4	12 1/4	29 1/2	72 13/16	73 1/4	1/2	32 3/4	33 1/16	95 1/2	12	14	3/4	316	337
	E6-45E-96	E7-45E-96	96	105	11 3/4	12 1/4	33 1/2	82 1/4	82 11/16	1/2	35 9/16	35 7/8	107 1/2	12	14	3/4	350	374


### RUBBER CUSHION IMPACT TROUGHING IDLER- 6" & 7" DIAMETER






	PART I	NUMBER	вw	Α		В	С	D	Е		F	G	Н	J	к	W	<b>/</b> T
	6''	7''	DVV	^	6''	7''				6"	7''			,	, ,	6''	7''
	E6-20EI-36	E7-20EI-36	36	45	10 3/4	11 1/4	13 1/16	41	1/2	15 3/8	15 11/16	47 1/2	9 1/2	12	3/4	148	163
	E6-20EI-42	E7-20EI-42	42	51	10 3/4	11 1/4	15 1/16	46 3/4	1/2	16 3/16	16 1/2	53 1/2	9 1/2	12	3/4	165	181
	E6-20EI-48	E7-20EI-48	48	57	10 3/4	11 1/4	17 13/16	54 7/16	1/2	17	17 1/4	59 1/2	9 1/2	12	3/4	188	205
20°	E6-20EI-54	E7-20EI-54	54	63	10 3/4	11 1/4	19 13/16	60 1/4	1/2	17 5/8	17 15/16	65 1/2	9 1/2	12	3/4	204	222
20	E6-20EI-60	E7-20EI-60	60	69	10 3/4	11 1/4	21 13/16	66 3/16	1/2	18 3/8	18 11/16	71 1/2	9 1/2	12	3/4	220	240
	E6-20EI-72	E7-20EI-72	72	81	11 1/2	12	25 13/16	77 1/2	1/2	20 7/16	20 3/4	83 1/2	9 1/2	12	3/4	255	277
	E6-20EI-84	E7-20EI-84	84	93	11 3/4	12 1/4	29 13/16	89 3/16	1/2	22 1/16	22 3/8	95 1/2	12	14	3/4	288	313
	E6-20EI-96	E7-20EI-96	96	105	11 3/4	12 1/4	33 13/16	100 3/4	1/2	23 7/16	23 3/4	107 1/2	12	14	3/4	321	349
	E6-35EI-36	E7-35EI-36	36	45	10 3/4	11 1/4	13 1/16	37 1/8	1/2	18 1/4	18 9/16	47 1/2	9 1/2	12	3/4	155	168
	E6-35EI-42	E7-35EI-42	42	51	10 3/4	11 1/4	15 1/16	42 7/16	1/2	19 3/8	19 11/16	53 1/2	9 1/2	12	3/4	171	187
	E6-35EI-48	E7-35EI-48	48	57	10 3/4	11 1/4	17 13/16	49 11/16	1/2	21	21 5/16	59 1/2	9 1/2	12	3/4	194	212
35°	E6-35EI-54	E7-35EI-54	54	63	10 3/4	11 1/4	19 13/16	55	1/2	22 1/8	22 7/16	65 1/2	9 1/2	12	3/4	211	230
35	E6-35EI-60	E7-35EI-60	60	69	10 3/4	11 1/4	21 13/16	60 1/4	1/2	23 1/4	23 9/16	71 1/2	9 1/2	12	3/4	228	248
	E6-35EI-72	E7-35EI-72	72	81	11 1/2	12	25 13/16	70 3/4	1/2	26 3/16	26 1/2	83 1/2	9 1/2	12	3/4	264	286
	E6-35EI-84	E7-35EI-84	84	93	11 3/4	12 1/4	29 13/16	81 15/16	1/2	29 1/16	29 3/8	95 1/2	12	14	3/4	298	323
	E6-35EI-96	E7-35EI-96	96	105	11 3/4	12 1/4	33 13/16	91 7/8	1/2	31 1/8	31 7/16	107 1/2	12	14	3/4	332	360
	E6-45EI-36	E7-45EI-36	36	45	10 3/4	10 3/4	13 1/16	33 7/8	1/2	19 7/8	20 3/16	47 1/2	9 1/2	12	3/4	158	173
	E6-45EI-42	E7-45EI-42	42	51	10 3/4	10 3/4	15 1/16	38 2/3	1/2	21 5/16	21 5/8	53 1/2	9 1/2	12	3/4	676	192
	E6-45EI-48	E7-45EI-48	48	57	10 3/4	10 3/4	17 13/16	45 5/16	1/2	23 1/4	23 9/16	59 1/2	9 1/2	12	3/4	200	218
45°	E6-45EI-54	E7-45EI-54	54	63	10 3/4	10 3/4	19 13/16	50 1/8	1/2	24 5/8	24 15/16	65 1/2	9 1/2	12	3/4	217	236
45	E6-45EI-60	E7-45EI-60	60	69	10 3/4	10 3/4	21 13/16	55	1/2	26 1/16	26 3/8	71 1/2	9 1/2	12	3/4	234	254
	E6-45EI-72	E7-45EI-72	72	81	11 1/2	11 1/2	25 13/16	64 5/8	1/2	29 5/8	29 15/16	83 1/2	9 1/2	12	3/4	271	293
	E6-45EI-84	E7-45EI-84	84	93	11 3/4	11 3/4	29 13/16	74 5/16	1/2	32 3/4	33 1/16	95 1/2	12	14	3/4	307	331
	E6-45EI-96	E7-45EI-96	96	105	11 3/4	11 3/4	33 13/16	83 3/4	1/2	35 9/16	35 7/8	107 1/2	12	14	3/4	341	368


### 6" & 7" DIAMETER - RUBBER CUSHION RETURNIDLERS






6" PART	7" PART	вw	Α	В	С	W	/T
NUMBER	NUMBER	D**				6"	7"
E6-RETI-36	E7-RETI-36	36	45	38 5/16	48	73	81
E6-RETI-42	E7-RETI-42	42	51	44 5/16	54	83	92
E6-RETI-48	E7-RETI-48	48	57	50 5/16	60	95	100
E6-RETI-54	E7-RETI-54	54	63	56 5/16	66	103	112
E6-RETI-60	E7-RETI-60	60	69	62 5/16	72	112	124
E6-RETI-72	E7-RETI-72	72	81	74 5/16	84	130	145
E6-RETI-84	E7-RETI-84	84	93	86 5/16	96	150	165
E6-RETI-96	E7-RETI-96	96	105	98 5/16	108	168	184

### SELF-ALIGNING TROUGHING IDLER- 6" & 7" DIAMETER

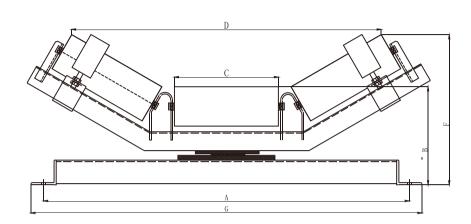




	PART N	UMBER	ВW		В		С	D	-	ı	=	G	Н	J	к	W	Т
	6"	7"	BW	Α	6"	7''	C	, b	E	6"	7''	G	п	J	,	6''	7"
	E6-20EA-36	E7-20EA-36	36	45	9 7/8	12 3/8	12 3/4	21 5/16	30 5/8	12 5/16	16 13/16	28 7/8	9 1/2	11 1/2	5/8	240	251
	E6-20EA-42	E7-20EA-42	42	51	9 7/8	12 3/8	14 3/4	27 1/16	36 3/8	13	17 1/8	34 7/8	9 1/2	11 1/2	5/8	266	279
	E6-20EA-48	E7-20EA-48	48	57	9 15/16	12 3/8	17 1/2	32 13/16	42 3/16	13 3/4	18 3/8	40 7/8	9 1/2	11 1/2	5/8	291	306
000	E6-20EA-54	E7-20EA-54	54	63	9 15/16	12 3/8	19 1/2	38 9/16	47 15/16	14 7/16	19 1/16	46 7/8	9 1/2	11 1/2	5/8	315	331
20°	E6-20EA-60	E7-20EA-60	60	69	10 5/16	12 3/8	21 1/2	44 5/16	53 15/16	15 1/2	19 3/16	52 7/8	9 1/2	11 1/2	5/8	339	356
	E6-20EA-72	E7-20EA-72	72	81	10 5/16	13 1/8	25 1/2	50 1/16	59 1/16	16 3/16	21 7/8	58 7/8	9 1/2	11 1/2	5/8	384	403
	E6-20EA-84	E7-20EA-84	84	93	10 7/16	13 1/8	29 1/2	55 13/16	65 7/16	17	23 1/2	64 7/8	12	11 1/2	5/8	432	454
	E6-20EA-96	E7-20EA-96	96	105	10 7/16	13 1/8	33 1/2	61 9/16	71 3/16	17 11/16	24 7/8	70 7/8	12	11 1/2	5/8	476	500
	E6-35EA-36	E7-35EA-36	36	45	9 7/8	12 3/8	12 3/4	55 3/16	1 9/16	14 1/16	19 11/16	28 7/8	9 1/2	11 1/2	5/8	245	256
	E6-35EA-42	E7-35EA-42	42	51	9 7/8	12 3/8	14 3/4	60 11/16	1 9/16	15 1/4	20 13/16	34 7/8	9 1/2	11 1/2	5/8	271	284
	E6-35EA-48	E7-35EA-48	48	57	9 15/16	12 3/8	17 1/2	67 7/8	1 9/16	16 7/16	22 7/16	40 7/8	9 1/2	11 1/2	5/8	296	311
	E6-35EA-54	E7-35EA-54	54	63	9 15/16	12 3/8	19 1/2	73 1/8	1 9/16	17 9/16	23 9/16	46 7/8	9 1/2	11 1/2	5/8	320	336
35°	E6-35EA-60	E7-35EA-60	60	69	10 5/16	12 3/8	21 1/2	78 7/16	1 9/16	19 1/16	24 11/16	52 7/8	9 1/2	11 1/2	5/8	344	361
	E6-35EA-72	E7-35EA-72	72	81	10 5/16	13 1/8	25 1/2	88 7/16	1 9/16	20 1/4	27 5/8	58 7/8	9 1/2	11 1/2	5/8	390	409
	E6-35EA-84	E7-35EA-84	84	93	10 7/16	13 1/8	29 1/2	99 1/2	1 9/16	21 1/2	30 1/2	64 7/8	12	11 1/2	5/8	438	460
	E6-35EA-96	E7-35EA-96	96	105	10 7/16	13 1/8	33 1/2	110 1/16	1 9/16	22 11/16	32 9/16	70 7/8	12	11 1/2	5/8	482	506
	E6-45EA-36	E7-45EA-36	36	45	9 7/8	12 3/8	12 3/4	57 3/8	1 9/16	14 7/8	21 5/16	28 7/8	9 1/2	11 1/2	5/8	250	261
	E6-45EA-42	E7-45EA-42	42	51	9 7/8	12 3/8	14 3/4	62 1/4	1 9/16	16 5/16	22 3/4	34 7/8	9 1/2	11 1/2	5/8	276	289
	E6-45EA-48	E7-45EA-48	48	57	9 15/16	12 3/8	17 1/2	68 7/8	1 9/16	17 3/4	24 11/16	40 7/8	9 1/2	11 1/2	5/8	301	316
_	E6-45EA-54	E7-45EA-54	54	63	9 15/16	12 3/8	19 1/2	73 11/16	1 9/16	19 1/8	26 1/16	46 7/8	9 1/2	11 1/2	5/8	325	341
45°	E6-45EA-60	E7-45EA-60	60	69	10 5/16	12 3/8	21 1/2	78 1/2	1 9/16	20 15/16	27 1/2	52 7/8	9 1/2	11 1/2	5/8	349	366
	E6-45EA-72	E7-45EA-72	72	81	10 5/16	13 1/8	25 1/2	88 3/16	1 9/16	22 3/8	31 1/16	58 7/8	9 1/2	11 1/2	5/8	396	415
	E6-45EA-84	E7-45EA-84	84	93	10 7/16	13 1/8	29 1/2	97 13/16	1 9/16	23 7/8	34 3/16	64 7/8	12	11 1/2	5/8	445	467
	E6-45EA-96	E7-45EA-96	96	105	10 7/16	13 1/8	33 1/2	104 7/8	1 9/16	25 5/16	37	70 7/8	12	11 1/2	5/8	482	506




### RETURN IDLERS - 6" & 7" DIAMETER



6" PART	7" PART	BW	А	В	С	W	/T*
NUM BER	NUM BER	DVV	^	ь		6"	7"
E6-RET-36	E7-RET-36	36	45	39	48	103	103
E6-RET-42	E7-RET-42	42	51	45	54	116	116
E6-RET-48	E7-RET-48	48	57	51	60	129	129
E6-RET-54	E7-RET-54	54	63	57	66	132	132
E6-RET-60	E7-RET-60	60	69	63	72	145	145
E6-RET-72	E7-RET-72	72	81	75	84	171	171
E6-RET-84	E7-RET-84	84	93	87	96	197	197
E6-RET-96	E7-RET-96	96	105	99	108	223	223


### RUBBER CUSHION FLAT IDLERS - 6" & 7" DIAMETER

6" PART	7" PART	вw	А	В	С	V	/T*
NUMBER	NUMBER	DVV	^	ь		6"	7"
E6-FLTI-36	E7-FLTI-36	36	45	38 5/16	47 1/2	81	93
E6-FLTI-42	E7-FLTI-42	42	51	44 5/16	53 1/2	93	107
E6-FLTI-48	E7-FLTI-48	48	57	50 5/16 56	59 1/2	104	120
E6-FLTI-54	E7-FLTI-54	54	63	56 5/16 56	65 1/2	116	134
E6-FLTI-60	E7-FLTI-60	60	69	62 5/16	71 1/2	128	148
E6-FLTI-72	E7-FLTI-72	72	81	74 5/16	83 1/2	151	175
E6-FLTI-84	E7-FLTI-84	84	93	86 5/16	95 1/2	175	202
E6-FLTI-96	E7-FLTI-96	96	105	98 5/16	107 1/2	198	229




### FLAT IDLERS - 6" & 7" DIAMETER

6" PART	7" PART	вw	Α	В	С	W	/T*
NUMBER	NUMBER	DVV	^	ь	C	6"	7"
E6-FLT-36	E7-FLT-36	36	45	39	47 1/2	83	103
E6-FLT-42	E7-FLT-42	42	51	45	53 1/2	95	116
E6-FLT-48	E7-FLT-48	48	57	51	59 1/2	107	129
E6-FLT-54	E7-FLT-54	54	63	57	65 1/2	118	132
E6-FLT-60	E7-FLT-60	60	69	63	71 1/2	130	145
E6-FLT-72	E7-FLT-72	72	81	75	83 1/2	154	171
E6-FLT-84	E7-FLT-84	84	93	87	95 1/2	177	197
E6-FLT-96	E7-FLT-96	96	105	99	107 1/2	200	223



### RETURN ALIGNING IDLERS - 6" & 7" DIAMETER



6" PART	7" PART	вw	А	В	С	D	W	Γ*
NUMBER	NUMBER	DVV	^	В			6"	7"
E6-RETA-36	E7-RETA-36	36	45	39	48 1/2	40 5/8	246	270
E6-RETA-42	E7-RETA-42	42	51	45	54 1/2	46 5/8	269	290
E6-RETA-48	E7-RETA-48	48	57	51	60 1/2	52 5/8	292	314
E6-RETA-54	E7-RETA-54	54	63	57	66 1/2	58 5/8	314	328
E6-RETA-60	E7-RETA-60	60	69	63	72 1/2	64 5/8	337	352
E6-RETA-72	E7-RETA-72	72	81	75	84 1/2	76 5/8	383	400
E6-RETA-84	E7-RETA-84	84	93	87	96 1/2	88 5/8	428	448
E6-RETA-96	E7-RETA-96	96	105	99	108 1/2	100 5/8	473	496

### CEMA B REPLACEMENT IDLER ROLLERS:

	Belt Width	Assuembled Roll Approx. Length	4" Dia.Roll Part Number	Weight	5" Dia Roll Part Number	Weight
	14 & 16	6 1/16	B4-14	4	B5-14	6
	18	7 1/16	B4-18	5	B5-18	7
	20	7 11/16	B4-20	5	B5-20	7
Equal	24	9 1/16	B4-24	6	B5-24	8
Length Idler Rolls	30	11 1/16	B4-30	7	B5-30	10
	36	13 1/16	B4-36	8	B5-36	11
	42	15 1/16	B4-42	9	B5-42	13
	48	17 1/16	B4-48	11	B5-48	14
	18	7 1/16	B4-EI-18	6	B5-EI-18	9
	20	7 11/16	B4-EI-20	7	B5-E <b>I-</b> 20	10
Rubber	24	9 1/16	B4-E <b>I</b> -24	8	B5-E <b>I</b> -24	11
Impact Idler	30	11 1/16	B4-EI-30	10	B5-EI-30	13
Rolls	36	13 1/16	B4-E <b>I-</b> 36	12	B5-E <b>I-</b> 36	16
	42	15 1/16	B4-EI-42	14	B5-EI-42	18
	48	17 1/16	B4-EI-48	18	B5-EI-48	21

### CEMA C REPLACEMENT IDLER ROLLERS:

	Belt Width	Assuembled Roll Approx. Length	4" Dia.Roll Part Number	Weight	5" Dia Roll Part Number	Weight	6" Dia Roll Part Number	Weight
	18	7 1/16	C4-18	6	C5-18	8	C6-18	9
	24	9 1/16	C4-24	7	C5-24	9	C6-24	11
	30	11 1/16	C4-30	8	C5-30	11	C6-30	12
Equal Length Idler Rolls	36	13 1/16	C4-36	9	C5-36	12	C6-36	13
	42	15 1/16	C4-42	10	C5-42	13	C6-42	15
	48	17 1/16	C4-48	11	C5-48	15	C6-48	17
	54	19 1/16	C4-54	12	C5-54	16	C6-54	19
	60	21 1/16	C4-60	13	C5-60	18	C6-60	21
	18	7 1/16	C4-EI-18	8	C5-EI-18	10	C6-EI-18	12
	24	9 1/16	C4-EI-24	10	C5-E <b>I-</b> 24	12	C6-EI-24	15
	30	11 1/16	C4-EI-30	12	C5-EI-30	14	C6-EI-30	17
Rubber	36	13 1/16	C4-EI-36	14	C5-EI-36	16	C6-EI-36	19
Impact Idler Rolls	42	15 1/16	C4-EI-42	17	C5-EI-42	19	C6-E <b>I-</b> 42	22
	48	17 1/16	C4-EI-48	19	C5-E <b>I-</b> 48	21	C6-E <b>I</b> -48	26
	54	19 1/16	C4-EI-54	21	C5-EI-54	24	C6-EI-54	27
	60	21 1/16	C4-EI-60	24	C5-EI-60	26	C6-EI-60	28

### CEMA D REPLACEMENT IDLER ROLLS

	Belt Width	Assuembled Roll Approx. Length	5" Dia.Roll Part Number	Weight	6" Dia Roll Part Number	Weight
	18	7 1/16	D5-18	8	D6-18	9
	24	9 1/16	D5-24	9	D6-24	11
	30	11 1/16	D5-30	11	D6-30	12
	36	13 1/16	D5-36	12	D6-36	13
Equal Length  Idler Rolls	42	15 1/16	D5-42	13	D6-42	15
Idioi Itolio	48	17 1/16	D5-48	15	D6-48	17
	54	19 1/16	D5-54	16	D6-54	19
	60	21 1/16	D5-60	18	D6-60	21
	72	25 1/16	D5-72	23	D6-72	27
	18	7 1/16	D5-EI-18	10	D6-EI-18	12
	24	9 1/16	D5-EI-24	12	D6-EI-24	15
	30	11 1/16	D5-EI-30	14	D6-EI-30	17
	36	13 1/16	D5-EI-36	16	D6-EI-36	19
Rubber Impact Idler Rolls	42	15 1/16	D5-EI-42	19	D6-EI-42	22
IGIEL TOUS	48	17 1/16	D5-EI-48	21	D6-E <b>I</b> -48	26
	54	19 1/16	D5-EI-54	24	D6-EI-54	27
	60	21 1/16	D5-EI-60	26	D6-EI-60	28
	72	25 1/16	D5-EI-72	31	D6-EI-72	34

### CEMA E REPLACEMENT IDLER ROLLS

	Belt Width	Assuembled Roll Approx. Length	6" Dia.Roll Part Number	Weight	7" Dia Roll Part Number	Weight
	36	12-3/4	E6-36	32	E7-36	36
	42	14-3/4	E6-42	36	E7-42	40
	48	17-1/2	E6-48	41	E7-48	46
Equal Length	54	19-1/2	E6-54	45	E7-54	51
Idler Rolls	60	21-1/2	E6-60	49	E7-60	55
	72	25-1/2	E6-72	57	E7-72	64
	84	29-1/2	E6-84	65	E7-84	72
	96	33-1/2	E6-96	73	E7-96	81
	36	12-3/4	E6-EI-36	29	E7-EI-36	33
	42	14-3/4	E6-EI-42	33	E7-E <b>I</b> -42	37
	48	17-1/2	E6-EI-48	39	E7-E <b>I-</b> 48	44
Rubber Impact	54	19-1/2	E6-EI-54	43	E7-EI-54	49
Idler Rolls	60	21-1/2	E6-E <b>I</b> -60	47	E7-E <b>I</b> -60	53
	72	25-1/2	E6-EI-72	54	E7-EI-72	62
	84	29-1/2	E6-E <b>I</b> -84	62	E7-E <b>l</b> -84	71
	96	33-1/2	E6-EI-96	70	E7-E <b>I</b> -96	80

Together, We Make It Better.



#### MONSTER BELTING INDUSTRY CO,. LTD